


**SCHEMATIC**

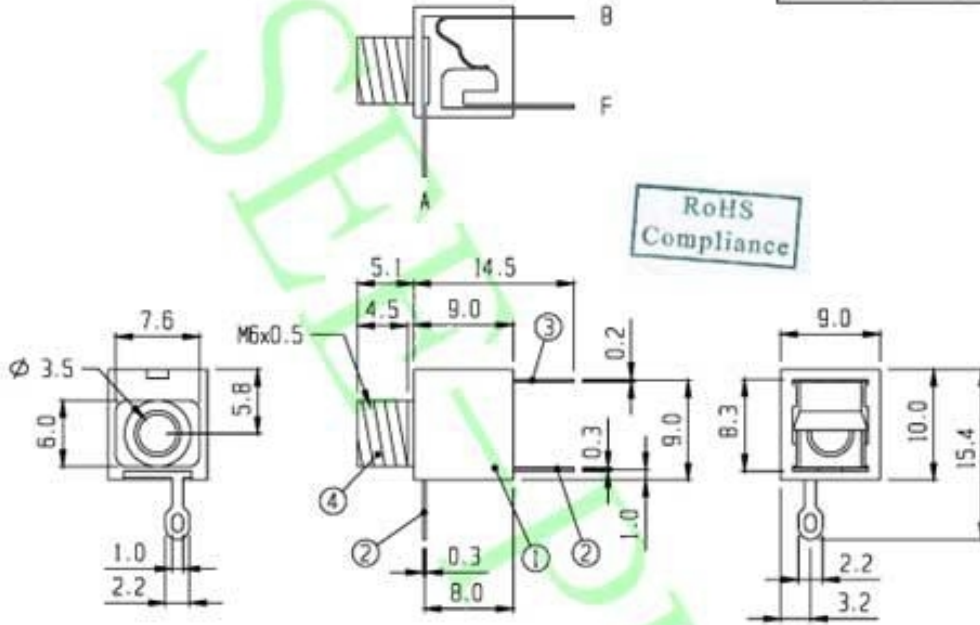

4	SHEATH	BRASS	1	Ni PLATED	
3	MOVEABLE TERMINAL	P B S	1	Ag PLATED	
2	TERMINAL	BRASS	2	Ag PLATED	
1	FRAME	A B S	1		
NO.	PART	MATERIAL	QTY	REMARKS	
ISSUED		SPECIFICATION		TITLE: MONO TYPE EARPHONE JACK	
	RATING: DC 30V 0.3A		MODEL NO: EJ-3501		
	CONTACT RESISTANCE: 50mΩ max.				
	INSULATION RESISTANCE: 100MΩ AT 500V DC		TOLERANCE	UNIT: MM	DWN. <i>hro</i>
	WITHSTAND VOLTAGE: AC 500V for 1 minute		UP TO 1.0:±0.1	SCALE: 2:1	CHK'D. <i>hro</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION		1.0 TO 10.0:±0.2	VERSION: 3	APPD. <i>hro</i>
SWITCHING LIFE: 5K cycles (15-18 cycles/min unloading)		OVER 10.0:±0.3	DRWG NO:		
BY: <i>hro</i>	SEE-PLUS INDUSTRIAL LTD.				
DATE: 29-DEC-2000					