

5mm Round Pure Green LED T-1 3/4 Technical Data Sheet

Part No.: LL-504PGC2V-G5-2CD

Http://www.luckylight.cn



Features:

- \diamond Choice of various color.
- \diamond Available on tape and reel.
- \diamond Reliable and robust.
- $\diamond~$ The product itself will remain within RoHS compliant Version.

Descriptions:


- \diamond The series is specially designed for applications requiring higher brightness.
- $\diamond~$ The LED lamps are available with different colors, intensities.

Applications:

- \diamond TV set.
- ♦ Monitor.
- \diamond Telephone.
- ♦ Computer.
- ♦ Circuit board.
- ♦ Status indicators.
- ♦ Commercial use.
- $\diamond~$ Advertising Signs.
- $\diamond~$ Back lighting.



Package Dimension:

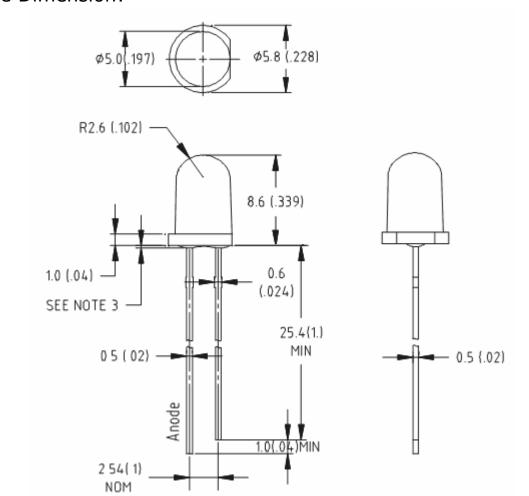

Part No.	Chip Material	Lens Color	Source Color
LL-504PGC2V-G5-2CD	InGaN	Water Clear	Pure Green

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is \pm 0.25 mm (.010") unless otherwise noted.
- 3. Protruded resin under flange is 1.00 mm (.04'') max.
- 4. Specifications are subject to change without notice.



Absolute Maximum Ratings at Ta=25℃

Parameters	Symbol	Max.	Unit
Power Dissipation	PD	120	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFP	100	mA
Forward Current	IF	30	mA
Reverse Voltage	VR	5	V
Operating Temperature Range	Topr	-40°C to +80°C	
Storage Temperature Range	Tstg	-40℃ to +85℃	
Lead Soldering Temperature [4mm(.157") From Body]	Tsld	260℃ for 5 Seconds	

Electrical Optical Characteristics at Ta=25°C

Parameters	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Viewing Angle*	20 _{1/2}		30		Deg	(Note 2)
Forward Voltage	V_{F}	2.7	3.2	4.0	V	IF =20mA
Reverse Current	I _R			10	μA	V _R =5V
Peak Emission Wavelength	λр		520		nm	IF =20mA
Dominant Wavelength	λd		525		nm	IF =20mA
Spectrum Radiation Bandwidth	Δλ		35		nm	IF =20mA
Luminous Intensity (Note 1)*	IV	5000	8000		mcd	IF =20mA

Notes:

1. Luminous Intensity Measurement allowance is $\pm 10\%$.

2. $\theta_{1/2} \, \text{is the off-axis angle at which the luminous intensity is half the axial luminous intensity.$



Reliability Test Items And Conditions:

The reliability of products shall be satisfied with items listed below:

Confidence level: 90%.

LTPD: 10%.

1) Test Items and Results:


Test Item	Standard	Test Conditions	Note	Number of
	Test Method		note	Damaged
Resistance to Soldering Heat	JEITA ED-4701 300 302	Tsld=260±5℃, 10sec 3mm from the base of the epoxy bulb	1 time	0/100
Solder ability	JEITA ED-4701 300 303	Tsld=235±5℃, 5sec(using flux)	1time over 95%	0/100
Thermal Shock	JEITA ED-4701 300 307	0℃~100℃ 15sec, 15sec	100 cycles	0/100
Temperature Cycle	JEITA ED-4701 100 105	-40℃~25℃~100℃~25℃ 30min,5min,30min,5min	100 cycles	0/100
Moisture Resistance Cycle	JEITA ED-4701 200 203	25℃~65℃~-10℃ 90%RH 24hrs/1cycle	10 cycles	0/100
High Temperature Storage	JEITA ED-4701 200 201	Ta=100℃	1000hrs	0/100
Terminal Strength (Pull test)	JEITA ED-4701 400 401	Load 10N (1kgf) 10±1sec	No noticeable damage	0/100
Terminal Strength (bending test)	JEITA ED-4701 400 401	Load 5N (0.5kgf) 0°~90°~0° bend 2 times	No noticeable damage	0/100
Temperature Humidity Storage	JEITA ED-4701 100 103	Ta=60℃, RH=90%	1000hrs	0/100
Low Temperature Storage	JEITA ED-4701 200 202	Ta=-40℃	1000hrs	0/100
Steady State Operating Life		Ta=25℃, IF=30mA	1000hrs	0/100
Steady State Operating Life of High Humidity Heat		Ta=60℃, RH=90%, IF=30mA	500hrs	0/100
Choice of various viewing angles		Ta=-30℃, IF=30mA	1000hrs	0/100

2) Criteria For Judging The Damage:

Item	Symbol	Test Conditions	Criteria for Judgment		
			Min	Max	
Forward Voltage	VF	IF=20mA		F.V.*)×1.1	
Reverse Current	IR	VR=5V		F.V.*)×2.0	
Luminous Intensity	IV	IF=20mA	F.V.*)×0.7		

*) F.V.: First Value.



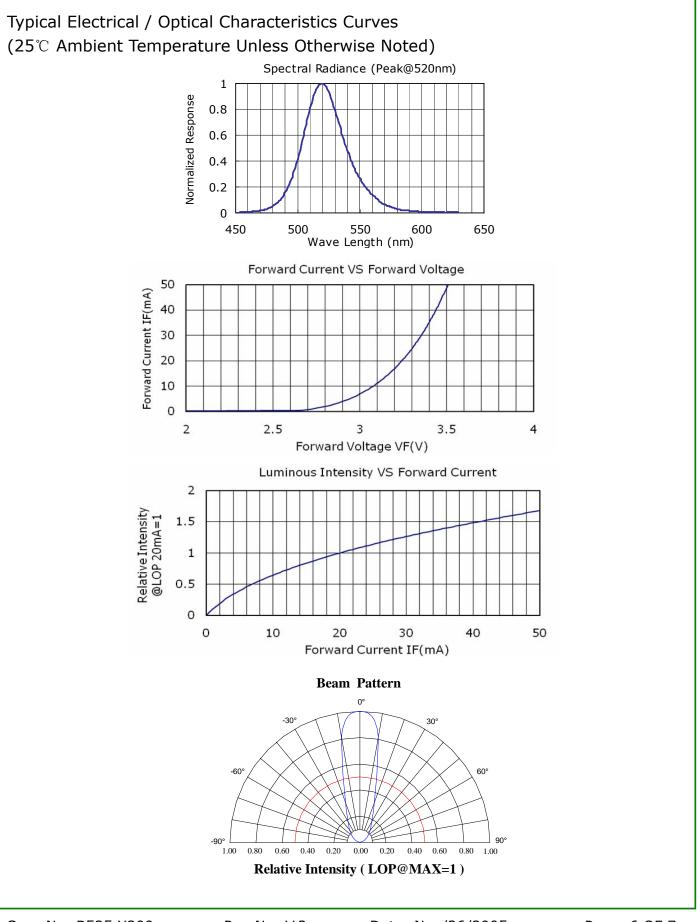

Spec No: B525 X200Rev No: V.2Approved: JoJoChecked: WuLucky Light Electronics Co., Ltd.

Date: Nov/26/2005 Drawn: Wang

Page: 6 OF 7

Http://www.luckylight.cn



Please read the following notes before using the datasheets:

1. Over-current-proof

Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1Do not open moisture proof bag before the products are ready to use.

2.2Before opening the package, the LEDs should be kept at 30° C or less and 90%RH or less.

2.3The LEDs should be used within a year.

2.4After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.

2.5 The LEDs should be used within 168 hours (7 days) after opening the package.

3. Soldering Condition

- 3.1Pb-free solder temperature profile
- 3.2Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260°C for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

6. Caution in ESD

Static Electricity and surge damages the LED. It is recommend to use a wrist band or anti-electrostatic glove when handling the LED. All devices equipment and machinery must be properly grounded.

7. Specifications are subject to change without notice.