

### Features

- Operating voltage: 3.0V~5.2V
- 18 bidirectional I/O lines
- Interrupt input
- 8-bit programmable timer/event counter with overflow interrupt
- On-chip crystal and RC oscillator
- Watchdog timer
- 1K × 14 program memory PROM
- 64 × 8 data memory RAM
- $1 \times 14$  option memory PROM

### **General Description**

The HT48R12 is an 8-bit high performance RISC-like microcontroller designed for multiple I/O product applications. The device is particularly suitable for use in products such as remote controllers, fan/light controllers, washing machine controllers, scales, toys and vari-

- Halt function and wake-up feature reduce power consumption
- Up to 1 $\mu$ s instruction cycle with 4MHz system clock at V<sub>DD</sub>=5V
- · All instructions in one or two machine cycles
- 14-bit table read instruction
- Two-level subroutine nesting
- Bit manipulation instruction
- 63 powerful instructions

1


ous subsystem controllers. A halt feature is included to reduce power consumption.

The program and option PROM can be electrically programmed making the HT48R12 suitable for use in product development.



### **Pin Assignment**

	<del>,</del>	PA3 🗖 1	20 🗖 PA4
PA3 🗖 1	18 🗆 PA4	PA2 🗖 2	19 🗖 PA5
PA2 🗖 2	17 🗖 PA5	PA1 🗖 3	18 🗖 PA6
PA1 🗖 3	16 🗖 PA6	PA0 🗖 4	17 🗖 PA7
PA0 🗖 4	15 🗖 PA7	РВЗ 🗖 5	16 🗆 OSC2
РВ0 🗖 5	14 🗖 OSC2	РВ2 🗖 6	15 🗖 OSC1
VSS 🗖 6	13 🗖 OSC1	PB1 🗖 7	14 🗖 VDD
	12 🗖 VDD	РВ0 🗖 8	13 🗖 RES
TMR 🗖 8		VSS 🗖 9	12 🗖 PC1
РС0 🗖 9	10 🗖 PC1	INT(TMR) 🗖 10	11 🗖 PC0
HT48	3R12	HT48	R12
	IP-F-0	– 20 DI	
PB5 🗖 1	24 🗆 PB6		
PB4 🗖 2	23 🗆 PB7		
РАЗ 🗖 З	21 🗖 PA4		
PA2 🗖 4	22 🗖 PA5		
PA1 🗖 5	20 🗖 PA6		
PA0 🗖 6	19 🗆 PA7		



Notes:

For the dice form, the TMR pad must be bonded to VDD or VSS if the TMR pad is not used.


The  $\overline{\text{INT}}$  (TMR) indicates the TMR pad must be bonded to the  $\overline{\text{INT}}$  pin.

For packaging of the HT48R12 microcontroller, the OSC2 pin (RC system oscillator only) should not be bonded out unless necessary.

2



## **Block Diagram**

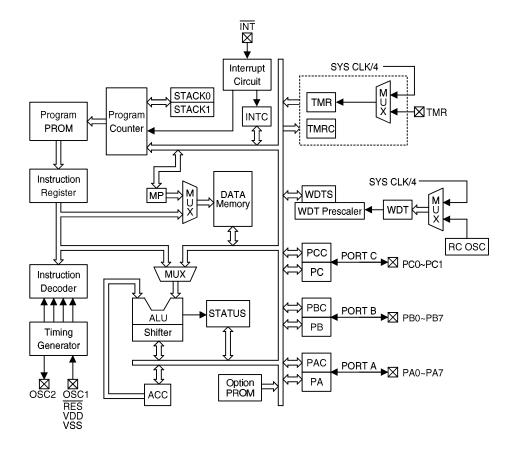

3



# **Pin Description**

Pin Name	I/O	ROM Code Option	Function
PA0~PA7	I/O	Wake-up	Bidirectional 8-bit input/output port. Each bit can be configured as wake-up input by ROM code option. Software instructions determine the CMOS output or schmitt trigger input with pull- high resistor.
PB0~PB7	I/O	_	Bidirectional 8-bit input/output port. Software instructions determine the CMOS output or schmitt trigger input with pull-high resistor.
VSS	_	_	Negative power supply, GND
ĪNT	Ι	_	External interrupt schmitt trigger input with pull-high resistor. Edge triggered is activated on high to low transition.
TMR	Ι	_	Schmitt trigger input for timer/event counter
PC0~PC1	I/O		Bidirectional 6-bit input/output port. Software instructions determine the CMOS output or schmitt trigger input with pull-high resistor.
RES	Ι	—	Schmitt trigger reset input. Active low
VDD	_	_	Positive power supply
OSC1 OSC2	I O	Crystal or RC	OSC1, OSC2 are connected to an RC network or Crystal (determined by ROM code option) for the internal system clock. In the case of RC operation, OSC2 is the output terminal for 1/4 system clock.

## **Absolute Maximum Ratings\***

Supply Voltage0.3V to 5.5V	Storage Temperature50°C to 125°C
Input Voltage $V_{SS}0.3V$ to $V_{DD}\mbox{+-}0.3V$	Operating Temperature25°C to 70°C

\*Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

4



## **D.C. Characteristics**

Ta=25°C

Symbol			Test Conditions	Min.	<b>T</b>	Max.	Unit
Symbol			Conditions	WIII.	Тур.	wax.	Umt
V <sub>DD</sub>	Operating Voltage	_	_	3.0	_	5.2	V
Inne	Operating Current	3V	No load, f <sub>SYS</sub> =2MHz	_	0.7	1.5	mA
I <sub>DD1</sub>	(Crystal OSC)	5V	100 1000, 1SYS=200112	_	1.8	3	mA
Inne	Operating Current	3V	No load, f <sub>SYS</sub> =2MHz	_	0.6	1	mA
I <sub>DD2</sub>	(RC OSC)	5V	No load, ISYS=2MITZ	_	1.6	3	mA
I <sub>STB1</sub>	Standby Current	3V	No load System HALT	_	_	5	μΑ
ISTB1	(WDT Enabled)	5V	No load, System HALT	_	_	10	μΑ
I <sub>STB2</sub>	Standby Current	3V	No load, System HALT	_	_	1	μΑ
ISTB2	(WDT Disabled)	5V	No load, System HALT	_	_	2	μΑ
V <sub>IL1</sub>	Input Low Voltage for I/O	3V	_	0	0.9	0.6	V
VIL1	Ports	5V	_	0	1.5	1.0	V
V	Input high Voltage for I/O	3V	_	2.4	2.1	3	V
V <sub>IH1</sub>	Ports	5V	_	4.0	3.5	5	V
V <sub>IL2</sub>	Input Low Voltage	3V	_	0	0.7	0.6	V
VIL2	(TMR, INT)	5V	_	0	1.3	1.0	V
V <sub>IH2</sub>	Input High Voltage	3V	—	2.4	2.3	3	V
VIH2	(TMR, INT)	5V	_	4.0	3.7	5	V
V <sub>IL3</sub>	Input Low Voltage (RES)	3V	_	_	1.5	_	V
VIL3	Input Low Voltage (RES)	5V	_	_	2.5	_	v
V <sub>IH3</sub>	Input High Voltage (RES)	3V	_	_	2.4	_	v
VIH3	Input Fight Voltage (RES)	5V	_	_	4.0	_	V
I	1/0 Donto Sink Cumont	3V	VDD=3V, VOL=0.3V	1.5	2.5	_	mA
I <sub>OL</sub>	DL I/O Ports Sink Current		V <sub>DD</sub> =5V, V <sub>OL</sub> =0.5V	4	6		mA
I <sub>OH</sub>	I/O Ports Source Current	3V	V <sub>DD</sub> =3V, V <sub>OH</sub> =2.7V	-1	-1.5		mA
±OH		5V	V <sub>DD</sub> =5V, V <sub>OH</sub> =4.5V	-2	-3		mA
Rph	Pull-High <u>Resi</u> stance of I/O	3V	—	40	60	80	kΩ
1VPH	Ports and $\overline{INT}$	5V		10	30	50	kΩ

3nd June '98



# A.C. Characteristics

Ta=25°C

6h - l	Descenter	,	Test Conditions	N/!	m		T Inc #4	
Symbol	Parameter	VDD	Conditions	Min.	Тур.	Max.	Unit	
£	System Clock	3V		400	_	2000	kHz	
f <sub>SYS1</sub>	(Crystal OSC)	5V		400	_	4000	kHz	
farras	System Clock	3V		400	_	2000	kHz	
f <sub>SYS2</sub>	(RC OSC)	5V	—	400	_	3000	kHz	
<b>f</b> timer	Timer I/P Frequency	3V		0	_	2000	kHz	
TIMER	(TMR)			0	_	4000	kHz	
tummoga	Wetch de a Orestilletera			45	90	180	μs	
twdtosc	Watchdog Oscillator	5V		35	65	130	μs	
turn	Watchdog Time-out Period	3V	Without WDT	12	23	45	ms	
twdt1	(RC)	5V	prescaler	9	17	35	ms	
t <sub>WDT2</sub>	Watchdog Time-out Period (System Clock)	_	Without WDT prescaler		1024	_	t <sub>SYS</sub>	
t <sub>RES</sub>	External Reset Low Pulse Width	_				_	μs	
t <sub>SST</sub>	System Start-up Timer Period	_	Power-up or Wake-up From Halt		1024	_	t <sub>SYS</sub>	
t <sub>INT</sub>	Interrupt Pulse Width	—	_	1			μs	


6

Note:  $t_{SYS}=1/f_{SYS}$ 



## **Application Circuit**

## RC oscillator for multiple I/O applications

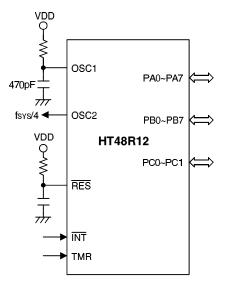

OSC1 PA0~PA7 ↔ OSC2 PB0~PB7 ↔ HT48R12 PC0~PC1 ↔ TMR

Crystal oscillator for multiple I/O applications

3nd June '98



### System Architecture

#### **Execution flow**

The system clock for the HT48R12 is derived from either a crystal or an RC oscillator. The system clock is internally divided into four nonoverlapping clocks. One instruction cycle consists of four system clock cycles.

Instruction fetching and execution are pipelined in such a way that a fetch takes an instruction cycle while decoding and execution take the next instruction cycle. However, the pipelining scheme causes each instruction to effectively execute in a cycle. If an instruction changes the program counter, two cycles are required to complete the instruction.

### Program counter – PC

The 10-bit program counter (PC) controls the sequence in which the instructions stored in program PROM are executed and its contents specify a maximum of 1024 addresses.

After accessing a program memory word to fetch an instruction code, the contents of the program counter are incremented by one. The program counter then points to the memory word containing the next instruction code.

When executing a jump instruction, conditional skip execution, loading PCL register, subroutine call, initial reset, internal interrupt, external interrupt or return from subroutine, the PC manipulates the program transfer by loading the address corresponding to each instruction.

The conditional skip is activated by instructions. Once the condition is met, the next instruction, fetched during the current instruction execution, is discarded and a dummy cycle replaces it to get the proper instruction. Otherwise proceed with the next instruction.

The lower byte of the program counter (PCL) is a readable and writable register (06H). Moving data into the PCL performs a short jump. The destination will be within 256 locations.

When a control transfer takes place, an additional dummy cycle is required.


#### Program memory – PROM

The program memory is used to store the program instructions which are to be executed. It also contains data, table, and interrupt entries, and is organized into  $1024 \times 14$  bits, addressed by the program counter and table pointer.

Certain locations in the program memory are reserved for special usage:

• Location 000H

This area is reserved for program initialization. After chip reset, the program always begins execution at location 000H.

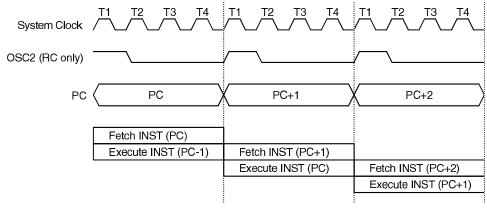

Execution flow

8



#### • Location 004H


This area is reserved for the external interrupt service program. If the  $\overline{INT}$  input pin is activated, the interrupt is enabled and the stack is not full, the program begins execution at location 004H.

Location 008H

This area is reserved for the timer/event Counter interrupt service program. If a timer interrupt results from a Timer/event Counter overflow, and if the interrupt is enabled and the stack is not full, the program begins execution at location 008H.

Table location

Any location in the PROM space can be used as look-up tables. The instructions "TABRDC [m]" (the current page, 1 page=256 words) and "TABRDL [m]" (the last page) transfer the contents of the lower-order byte to the specified data memory, and the higher-order byte to TBLH (08H). Only the destination of the lower-order byte in the table is well-defined, the other bits of the table word are transferred to the lower portion of TBLH, and the remaining 2 bits are read as "0". The table higher-order byte register (TBLH) is read only. The table pointer (TBLP) is a read/write register (07H), which indicates the table location. Before accessing the table, the location

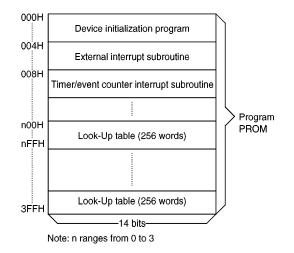

#### **Program memory**

must be placed in TBLP. The TBLH is read only and cannot be restored. If the main routine and the ISR (Interrupt Service Routine) both employ the table read instruction, the contents of the TBLH in the main routine are likely to be changed by the table read instruction used in the ISR. Errors can occur. In other words, using the table read instruction in the main routine and the ISR simultaneously should be avoided. However, if the table read instruction has to be applied in both the main routine and the ISR, the interrupt is supposed

Mode	Program Counter									
MIDDE	*9	*8	*7	*6	*5	*4	*3	*2	*1	*0
Initial Reset	0	0	0	0	0	0	0	0	0	0
External Interrupt		0	0	0	0	0	0	1	0	0
Timer/Event Counter Overflow		0	0	0	0	0	1	0	0	0
Skip										
Loading PCL	*9	*8	@7	@6	@5	@4	@3	@2	@1	@0
Jump, Call Branch	#9	#8	#7	#6	#5	#4	#3	#2	#1	#0
Return From Subroutine	S9	S8	S7	<b>S6</b>	S5	S4	S3	S2	S1	S0

Program counter

Notes: \*9~\*0: Program counter bits #9~#0: Instruction code bits S9~S0: Stack register bits @7~@0: PCL bits

3nd June '98



to be disabled prior to the table read instruction. It will not be enabled until the TBLH has been backed up. All table related instructions require two cycles to complete the operation. These areas may function as normal program memory depending upon the requirements.

#### Stack register – STACK

This is a special part of the memory which is used to save the contents of the program counter (PC) only. The stack is organized into two levels and is neither part of the data nor part of the program space, and is neither readable nor writable. The activated level is indexed by the stack pointer (SP) and is neither readable nor writeable. At a subroutine call or interrupt acknowledgment, the contents of the program counter are pushed onto the stack. At the end of a subroutine or an interrupt routine, signaled by a return instruction (RET or RETI), the program counter is restored to its previous value from the stack. After a chip reset, the SP will point to the top of the stack.

If the stack is full and a non-masked interrupt takes place, the interrupt request flag will be recorded but the acknowledgment will be inhibited. When the stack pointer is decremented (by RET or RETI), the interrupt will be serviced. This feature prevents stack overflow allowing the programmer to use the structure more easily. In a similar case, if the stack is full and a "CALL" is subsequently executed, stack overflow occurs and the first entry will be lost (only the most recent two return addresses are stored).

#### Data memory - RAM

The data memory is designed with  $81 \times 8$  bits. The data memory is divided into two functional

groups: special function registers and general purpose data memory ( $64 \times 8$ ). Most are read/write, but some are read only.

The special function registers include the indirect addressing register (00H), timer/event counter (TMR;0DH), timer/event counter control register (TMRC;0EH), program counter lower-order byte register (PCL;06H), memory pointer register (MP;01H), accumulator (ACC;05H), table pointer (TBLP;07H), table higher-order byte register (TBLH;08H), status register (STATUS;0AH), interrupt control register (INTC;0BH), watchdog timer option setting register (WDTS;09H), I/O registers (PA;12H, PB;14H, PC;16H) and I/O control registers (PAC;13H, PBC;15H, PCC;17H). The remaining space before the 40H is reserved for future expanded usage and reading these locations will get "00H". The general purpose data memory, addressed from 40H to 7FH, is used for data and control information under instruction commands.

All of the data memory areas can handle arithmetic, logic, increment, decrement and rotate operations directly. Except for some dedicated bits, each bit in the data memory can be set and reset by "SET [m].i" and "CLR [m].i". They are also indirectly accessible through the memory pointer register (MP;01H).

### Indirect addressing register

Location 00H is an indirect addressing register that is not physically implemented. Any read/write operation of [00H] accesses the data memory pointed to by MP (01H). Reading location 00H itself indirectly will return the result 00H. Writing indirectly results in no operation.

Instruction(s)	Table Location									
Instruction(s)	*9	*8	*7	*6	*5	*4	*3	*2	*1	*0
TABRDC [m]	P9	P8	@7	@6	@5	@4	@3	@2	@1	@0
TABRDL [m]	1	1	@7	@6	@5	@4	@3	@2	@1	@0

Table location

Notes: \*9~\*0: Table location bits @7~@0: Table pointer bits P9~P8: Current program counter bits

3nd June '98



The memory pointer register MP (01H) is a 7-bit register. The bit 7 of MP is undefined and reading will return the result "1". Any writing operation to MP will only transfer the lower 7-bit data to MP.

#### Accumulator

The accumulator is closely related to ALU operations. It is also mapped to location 05H of the data memory and is capable of carrying out immediate data operations. The data movement between two data memory locations must pass through the accumulator.

#### Arithmetic and logic unit – ALU

This circuit performs 8-bit arithmetic and logic operations. The ALU provides the following functions:

- Arithmetic operations (ADD, ADC, SUB, SBC, DAA)
- Logic operations (AND, OR, XOR, CPL)
- Rotation (RL, RR, RLC, RRC)
- Increment and Decrement (INC, DEC)
- Branch decision (SZ, SNZ, SIZ, SDZ ....)


The ALU not only saves the results of a data operation but also changes the status register.

#### Status register – STATUS

This 8-bit register (0AH) contains the zero flag (Z), carry flag (C), auxiliary carry flag (AC), overflow flag (OV), power down flag (PD), and watchdog time-out flag (TO). It also records the status information and controls the operation sequence.

With the exception of the TO and PD flags, bits in the status register can be altered by instructions like most other register. Any data written into the status register will not change the TO or PD flag. In addition operations related to the status register may give different results from those intended. The TO flag can be affected only by system power-up, a WDT time-out or executing the "CLR WDT" or "HALT" instruction. The PD flag can be affected only by executing the "HALT" or "CLR WDT" instruction or a system power-up.

The Z, OV, AC and C flags generally reflect the status of the latest operations.

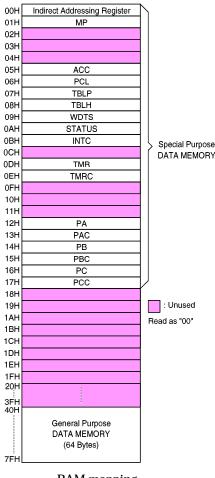

RAM mapping

In addition, on entering the interrupt sequence or executing the subroutine call, the status register will not be pushed onto the stack automatically. If the contents of status are important and if the subroutine can corrupt the status register, precautions must be taken to save it properly.

### Interrupt

The HT48R12 provides an external interrupt and internal timer/event counter interrupts. The interrupt control register (INTC;0BH) contains the interrupt control bits to set the enable/disable and the interrupt request flags.



Once an interrupt subroutine is serviced, all the other interrupts will be blocked (by clearing the EMI bit). This scheme may prevent any further interrupt nesting. Other interrupt requests may happen during this interval but only the interrupt request flag is recorded. If a certain interrupt requires servicing within the service routine, the EMI bit and the corresponding bit of the INTC may be set to allow interrupt nesting. If the stack is full, the interrupt request will not be acknowledged, even if the related interrupt is enabled, until the SP is decremented. If immediate service is desired, the stack must be prevented from becoming full.

All these kinds of interrupts have a wake-up capability. As an interrupt is serviced, a control transfer occurs by pushing the program counter onto the stack and then branching to subroutines at specified locations in the program memory. Only the program counter is pushed onto the stack. If the contents of the register or status register (STATUS) are altered by the interrupt service program which corrupts the desired control sequence, the contents must be saved in advance. External interrupts are triggered by a high to low transition of  $\overline{INT}$  and the related interrupt request flag (EIF; bit 4 of INTC) will be set. When the interrupt is enabled, the stack is not full and the external interrupt is active, a subroutine call to location 04H will occur. The interrupt request flag (EIF) and EMI bits will be cleared to disable other interrupts.

The internal timer/event counter interrupt is initialized by setting the timer/event counter interrupt request flag (TF; bit 5 of INTC), caused by a timer overflow. When the interrupt is enabled, the stack is not full and the TF bit is set, a subroutine call to location 08H will occur. The related interrupt request flag (TF) will be reset and the EMI bit cleared to disable further interrupts.

During the execution of an interrupt subroutine, other interrupt acknowledgments are held until the "RETI" instruction is executed or the EMI bit and the related interrupt control bit are set to 1 (if the stack is not full). To return from the interrupt subroutine, "RET" or "RETI" may be invoked. RETI will set the EMI bit to enable an interrupt service, but RET will not.

Interrupts, occurring in the interval between

Labels	Bits	Function
С	0	C is set if the operation results in a carry during an addition operation or if a borrow does not take place during a subtraction operation; otherwise C is cleared. C is also affected by a rotate through carry instruction.
AC	1	AC is set if the operation results in a carry out of the low nibbles in addition or no borrow from the high nibble into the low nibble in subtraction; otherwise AC is cleared.
Z	2	${\bf Z}$ is set if the result of an arithmetic or logic operation is zero; otherwise ${\bf Z}$ is cleared.
OV	3	OV is set if the operation results in a carry into the highest-order bit but not a carry out of the highest-order bit, or vice versa; otherwise OV is cleared.
PD	4	PD is cleared by system power-up or executing the "CLR WDT" instruction. PD is set by executing the "HALT" instruction.
то	5	TO is cleared by system power-up or executing the "CLR WDT" or "HALT" instruction. TO is set by a WDT time-out.
	6	Undefined, read as "0"
_	7	Undefined, read as "0"

STATUS register

12



the rising edges of two consecutive T2 pulses, will be serviced on the latter of the two T2 pulses, if the corresponding interrupts are enabled. In the case of simultaneous requests the following table shows the priority that is applied. These can be masked by resetting the EMI bit.

No.	Interrupt Source	Priority	Vector
а	External interrupt	1	04H
b	Timer/event counter overflow	2	08H

The timer/event counter interrupt request flag (TF), external interrupt request flag (EIF), enable timer/event counter bit (ETI), enable external interrupt bit (EEI) and enable master interrupt bit (EMI) constitute an interrupt control register (INTC) which is located at 0BH in the data memory. EMI, EEI, ETI are used to control the enabling/disabling of interrupts. These bits prevent the requested interrupt from being serviced. Once the interrupt request flags (TF, EIF) are set, they will remain in the INTC register until the interrupts are serviced or cleared by a software instruction.

It is recommended that a program does not use the "CALL subroutine" within the inter-

ruptsubroutine. Interrupts often occur in an unpredictable manner or need to be serviced immediately in some applications. If only one stack is left and enabling the interrupt is not well controlled, the original control sequence will be damaged once the "CALL" operates in the interrupt subroutine.

#### **Oscillator configuration**

There are two oscillator circuits in the HT48R12.

Both are designed for system clocks, namely the RC oscillator and the crystal oscillator, which are determined by the ROM code option. No matter what oscillator type is selected, the signal provides the system clock. The HALT mode stops the system oscillator and ignores an external signal to conserve power.

If an RC oscillator is used, an external resistor between OSC1 and VDD is required and the resistance must range from  $51k\Omega$  to  $1M\Omega$ . The system clock, divided by 4, is available on OSC2, which can be used to synchronize external logic. The RC oscillator provides the most cost effective solution. However, the frequency of oscillation may vary with VDD, temperatures and the chip itself due to process variations. It is, therefore, not suitable for timing sensitive operations where an accurate oscillator frequency is desired.

Register	Bit No.	Label	Function
	0	EMI	Controls the master (global) interrupt (1=enabled; 0=disabled)
	1	EEI	Controls the external interrupt (1=enabled; 0=disabled)
	2	ETI	Controls the timer/event counter interrupt (1=enabled; 0=disabled)
INTC (0BH)	3		Unused bit, read as "0"
()	4	EIF	External interrupt request flag (1=active; 0=inactive)
	5	TF	Internal timer/event counter request flag (1=active; 0=inactive)
	6	—	Unused bit, read as "0"
	7	_	Unused bit, read as "0"

**INTC** register

13




If the Crystal oscillator is used, a crystal across OSC1 and OSC2 is needed to provide the feedback and phase shift required for the oscillator, and no other external components are required. Instead of a crystal, a resonator can also be connected between OSC1 and OSC2 to get a frequency reference, but two external capacitors in OSC1 and OSC2 are required.

The WDT oscillator is a free running on-chip RC oscillator, and no external components are required. Even if the system enters the power down mode, the system clock is stopped, but the WDT oscillator still works with a period of approximately  $78\mu$ s. The WDT oscillator can be disabled by ROM code option to conserve power.

#### Watchdog timer - WDT

The WDT clock source is implemented by a dedicated RC oscillator (WDT oscillator) or instruction clock (system clock divided by 4), decided by ROM code option. This timer is designed to prevent a software malfunction or sequence from jumping to an unknown location with unpredictable results. The watchdog timer can be disabled by a ROM code option. If the watchdog timer is disabled, all the executions related to the WDT result in no operation.

Once an internal WDT oscillator (RC oscillator with a period of  $78\mu$ s normally) is selected, it is first divided by 256 (8-stages) to get the nominal time-out period of approximately 20ms. This time-out period may vary with temperatures, VDD and process variations. By invoking the WDT prescaler, longer time-out periods can be realized. Writing data to WS2, WS1, WS0 (bit 2,1,0 of the WDTS) can give different time-out periods. If WS2, WS1, and WS0 are all

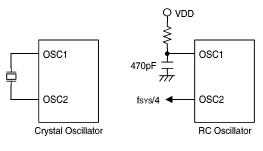


#### System oscillator

equal to 1, the division ratio is up to 1:128, and the maximum time-out period is 2.6 seconds.

If the WDT oscillator is disabled, the WDT clock may still come from the instruction clock and operate in the same manner except that in the HALT state the WDT may stop counting and lose its protecting purpose. In this situation the logic can only be restarted by external logic. The high nibble and bit 3 of the WDTS are reserved for user's defined flags, and the programmer may use these flags to indicate some specified status.

If the device operates in a noisy environment, using the on-chip RC oscillator (WDT OSC) is strongly recommended, since the HALT will stop the system clock.

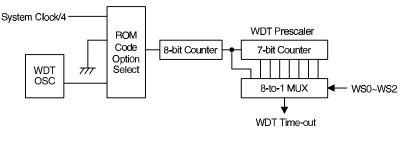

Watchdog timer

14

WS2	WS1	WS0	<b>Division Ratio</b>
0	0	0	1:1
0	0	1	1:2
0	1	0	1:4
0	1	1	1:8
1	0	0	1:16
1	0	1	1:32
1	1	0	1:64
1	1	1	1:128

#### WDTS register

The WDT overflow under normal operation will initialize "chip reset" and set the status bit "TO". But in the HALT mode, the overflow will initialize a "warm reset", and only the PC and SP are reset to zero. To clear the contents of WDT (including the WDT prescaler ), three methods are adopted; external reset (a low level to  $\overline{\text{RES}}$ ), software instruction and a "HALT" instruction. The software instructions include "CLR WDT" and the other set - "CLR WDT1" and "CLR WDT2". Of these two types of instruction, only one can be active depending on the ROM code option - "CLR WDT times selection option". If the "CLR WDT" is selected (i.e. CLRWDT times equal one), any execution of the "CLR WDT" instruction will clear the WDT. In the case that "CLR WDT1" and "CLR WDT2" are chosen (i.e. CLRWDT times equal two), these two instructions must be executed to clear the WDT: otherwise, the WDT may reset the chip as a result of time-out.

#### Power down operation - HALT

The HALT mode is initialized by the "HALT" instruction and results in the following...

- The system oscillator will be turned off but the WDT oscillator keeps running (if the WDT oscillator is selected).
- The contents of the on-chip RAM and registers remain unchanged.
- WDT and WDT prescaler will be cleared and recounted again (if the WDT clock is from the WDT oscillator).

- All of the I/O ports maintain their original status.
- The PD flag is set and the TO flag is cleared.

The system can leave the HALT mode by means of an external reset, an interrupt, an external falling edge signal on port A or a WDT overflow. An external reset causes a device initialization and the WDT overflow performs a "warm reset". After the TO and PD flags are examined, the reason for chip reset can be determined. The PD flag is cleared by system power-up or executing the "CLR WDT" instruction and is set when executing the "HALT" instruction. The TO flag is set if the WDT time-out occurs, and causes a wake-up that only resets the PC and SP; the others maintain their original status.

The port A wake-up and interrupt methods can be considered as a continuation of normal execution. Each bit in port A can be independently selected to wake-up the device by the ROM code option. Awakening from an I/O port stimulus, the program will resume execution of the next instruction. If it is awakening from an interrupt, two sequences may happen. If the related interrupt is disabled or the interrupt is enabled but the stack is full, the program will resume execution at the next instruction. If the interrupt is enabled and the stack is not full, the regular interrupt response takes place. If an interrupt request flag is set to "1" before entering the HALT mode, the wake-up function of the related interrupt will be disabled.

Once a wake-up event occurs, it takes  $1024 t_{SYS}$  (system clock period) to resume normal operation. In other words, a dummy period will be inserted after wake-up. If the wake-up results from an interrupt acknowledgment, the actual interrupt subroutine execution will be delayed by one or more cycles. If the wake-up results in the next instruction execution, this will be executed immediately after the dummy period is finished.

To minimize power consumption, all the I/O pins should be carefully managed before entering the HALT status.

15



### Reset


There are three ways in which a reset can occur:

- RES reset during normal operation
- RES reset during HALT
- WDT time-out reset during normal operation

The WDT time-out during HALT is different from other chip reset conditions, since it can perform a "warm reset" that resets only the PC and SP, leaving the other circuits in their normal state. Some registers remain unchanged during other reset conditions. Most registers are reset to the "initial condition" when the reset conditions are met. By examining the PD and TO flags, the program can distinguish between different "chip resets".

то	PD	<b>RESET Conditions</b>
0	0	RES reset during power-up
u	u	RES reset during normal operation
0	1	<b>RES</b> wake-up HALT
1	u	WDT time-out during normal operation
1	1	WDT wake-up HALT


Note: "u" means "unchanged".



Reset timing chart

To guarantee that the system oscillator is started and stabilized, the SST (System Startup Timer) provides an extra-delay to delay 1024 system clock pulses when system power-up or the system awakes from the HALT state.

When the system power-up occurs, the SST delay is added during the reset period. But when the reset comes from the  $\overline{\text{RES}}$  pin, the SST delay is disabled. Any wake-up from HALT will enable the SST delay.

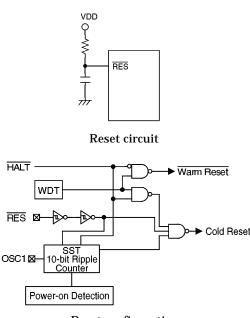

Reset configuration

The functional unit chip reset status are shown below:

PC	000H
Interrupt	Disable
Prescaler	Clear
WDT	Clear. After master reset, WDT begins counting
Timer/event counter	Off
Input/output ports	Input mode
SP	Points to the top of the stack

16



Register	Reset (Power On)	WDT Time-Out (Normal Operation)	RES Reset (Normal Operation)	RES Reset (HALT)	WDT Time- Out (HALT)
TMR	XXXX XXXX	uuuu uuuu	uuuu uuuu	uuuu uuuu	uuuu uuuu
TMRC	00-0 1	00-0 1	00-0 1	00-0 1	uu-u u
PC	000H	000H	000H	000H	000H*
MP	-XXX XXXX	-uuu uuuu	-uuu uuuu	-uuu uuuu	-uuu uuuu
ACC	XXXX XXXX	uuuu uuuu	uuuu uuuu	uuuu uuuu	uuuu uuuu
TBLP	xxxx xxxx	uuuu uuuu	uuuu uuuu	uuuu uuuu	uuuu uuuu
TBLH	XX XXXX	uu uuuu	uu uuuu	uu uuuu	uu uuuu
STATUS	00 xxxx	1u uuuu	uu uuuu	01 uuuu	11 uuuu
INTC	00 -000	00 -000	00 -000	00 -000	uu -uuu
WDTS	0000 0111	0000 0111	0000 0111	0000 0111	uuuu uuuu
PA	1111 1111	1111 1111	1111 1111	1111 1111	uuuu uuuu
PAC	1111 1111	1111 1111	1111 1111	1111 1111	uuuu uuuu
РВ	1111 1111	1111 1111	1111 1111	1111 1111	uuuu uuuu
PBC	1111 1111	1111 1111	1111 1111	1111 1111	uuuu uuuu
PC	11	11	11	11	uu
PCC	11	11	11	11	uu

The states of the registers is summarized in the table.

Note: "\*" means "warm reset" "u" means "unchanged" "x" means "unknown"

3nd June '98



#### **Timer/event counter**

A timer/event counter (TMR) is implemented in the HT48R12. It contains an 8-bit programmable count-up counter and the clock may come from an external source or the system clock divided by 4.

Using an internal instruction clock, there is only one reference time-base. The external clock input allows the user to count external events, measure time intervals or pulse widths, or to generate an accurate time base.


There are two registers related to the timer/event counter; TMR ([0DH]), TMRC ([0EH]). Two physical registers are mapped to TMR location; writing TMR makes the starting value be placed in the timer/event counter preload register and reading TMR gets the contents of the timer/event counter. The TMRC is a timer/event counter control register, which defines some options. The TM0, TM1 bits define the operating mode. The event count mode is used to count external events, which means the clock source comes from an external (TMR) pin. The timer mode functions as a normal timer with the clock source coming from the instruction clock. The pulse width measurement mode can be used to count the high or low level duration of the external signal (TMR). The counting is based on the instruction clock.

In the event count or timer mode, once the timer/event counter starts counting, it will count from the current contents in the timer/event counter to FFH. Once overflow occurs, the counter is reloaded from the timer/event counter preload register and generates the interrupt request flag (TF; bit 5 of the INTC) at the same time.

In the pulse width measurement mode with the TON and TE bits equal to one, once the TMR has received a transient from low to high

Label (TMRC)	Bits	Function
—	0-2	Unused bits, read as "0"
TE	3	To define the TMR active edge of the timer/event counter (0=active on low to high; 1=active on high to low)
TON	4	To enable/disable timer counting (0=disabled; 1=enabled)
_	5	Unused bits, read as "0"
TM0 TM1	6 7	To define the operating mode 01=Event count mode (external clock) 10=Timer mode (internal clock) 11=Pulse width measurement mode 00=Unused

TMRC register

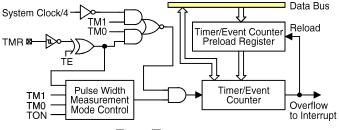

Timer/Event counter

3nd June '98



(or high to low if the TE bits is "0") it will start counting until the TMR returns to the original level and resets the TON. The measured result will remain in the timer/event counter even if the activated transient occurs again. In other words, only one cycle measurement can be done. Until setting the TON, the cycle measurement will function again as long as it receives further transient pulse. Note that, in this operating mode, the timer/event counter starts counting not according to the logic level but according to the transient edges. In the case of counter overflows, the counter is reloaded from the timer/event counter preload register and issues the interrupt request just like the other two modes.

To enable the counting operation, the timer ON bit (TON; bit 4 of TMRC) should be set to 1. In the pulse width measurement mode, the TON will be cleared automatically after the measurement cycle is completed. But in the other two modes the TON can only be reset by instructions. The overflow of the timer/event counter is one of the wake-up sources. No matter what the operation mode is, writing a 0 to ETI can disable the interrupt service.


In the case of timer/event counter OFF condition, writing data to the timer/event counter Preload register will also reload that data to the timer/event counter. But if the timer/event counter is turned on, data written to the timer/event counter will only be kept in the timer/event counter preload register. The timer/event counter will stilloperateuntiloverflowoccurs.

When the timer/event counter (reading TMR) is read, the clock will be blocked to avoid errors. As clock blocking may results in a counting error, this must be taken into consideration by the programmer.

#### Input/output ports

There are 18 bidirectional input/output lines in the HT48R12, labeled from PA to PC, which are mapped to the data memory of [12H], [14H] and [16H] respectively. All of these I/O ports can be used for input and output operations. For input operation, these ports are non-latching, that is, the inputs must be ready at the T2 rising edge of instruction "MOV A,[m]" (m=12H, 14H or 16H). For output operation, all the data is latched and remains unchanged until the output latch is rewritten.

Each I/O line has its own control register (PAC, PBC, PCC) to control the input/output configuration. With this control register, CMOS output or schmitt trigger input with pull-high resistor structures can be reconfigured dynamically (i.e., on-the-fly) under software control. To function as an input, the corresponding latch of the control register must write "1". The pull-high resistance will be exhibited automatically. The input source also depends on the control register. If the control

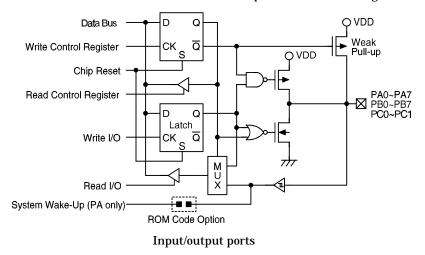

19



register bit is "1", the input will read the pad state. If the control register bit is "0", the contents of the latches will move to the internal bus. The latter is possible in the "read-modifywrite" instruction. For output function, CMOS is the only configuration. These control registers are mapped to locations 13H, 15H and 17H.

After a chip reset, these input/output lines remain at high levels. Each bit of these input/output latches can be set or cleared by "SET [m].i" and "CLR [m].i" (m=12H, 14H or 16H) instructions.

Some instructions first input data and then follow the output operations. For example, "SET [m].i", "CLR [m].i", "CPL [m]", "CPLA [m]" read the entire port states into the CPU, execute the defined operations (bit-operation), and then write the results back to the latches or the accumulator. Each line of port A has the capability of waking-up the device. The highest six bits of port C are not physically implemented; on reading them a "0" is returned whereas writing then results in a no-operation. Note that the pull-high options are not available for all I/O lines.

### ROM code option

The following table shows seven kinds of ROM code option in the HT48R12. All of the ROM code options must be defined to ensure proper system functioning.

Items	Option	Description
1	OP[7:0]	OP0~OP7 → PA0~PA7 Bit=0 Without wake-up Bit=1 With wake-up
2	OP8	Bit=0 RC mode Bit=1 Crystal mode
3	OP9	Bit=0 Two cycle CLRWDT Bit=1 One cycle CLRWDT
4	OP10	Unused bit This bit must be set as "0" by default.
5	OP11	Unused bit This bit must be set as "0" by default.
6	OP12	Bit=0 RC clock for WDT source Bit=1 System clock for WDT source
7	OP13	Bit=0 Enable WDT Bit=1 Disable WDT

3nd June '98



#### **PROM** programming and verification

The program memory used in the HT48R12 is arranged into a  $1K\times14$  bits program PROM and a  $1\times14$  bits option PROM. The program code and option code are stored in the program PROM and option PROM. The programming of PROM can be summarized in nine steps as described below:

- Power on
- Set VPP(RES) to 12.5V
- Set CS(PA5) to low

Let PA3~PA0 (AD3~AD0) be the address and data bus and the PA4 (CLK) be the clock input. The data on the AD3~AD0 pins will be clocked into or out of the HT48R12 on the falling edge of PA4 (CLK) for PROM programming and verification.

The address data contains the code address (11 bits) and two option bits. A complete write cycle will contain 4 CLK cycles. The first cycle, bits  $0 \sim 3$  of the address are latched into the HT48R12. The second and third cycles, bits  $4 \sim 7$  and bits  $8 \sim 9$  are latched respectively. The fourth cycle, bit 2 is the TSEL option bit and bit 3 is the OSEL option bit. Bits  $2 \sim 3$  in the third cycle and bits  $0 \sim 1$  in the fourth cycle are undefined. If the TSEL is "1" and the OSEL is "0", the TEST memory will be read. If the TSEL is "0" and the OSEL is "1", the option PROM will be accessed. If both the TSEL and OSEL are "0", the program PROM will be managed.

The code data is 14 bits wide. A complete read/write cycle contains four CLK cycles. In the first cycle, bits  $0 \sim 3$  of the code data are accessed. In the second and third, bits  $4 \sim 7$  and bits  $8 \sim 11$  are accessed respectively. In the fourth cycle, bits  $12 \sim 13$  are accessed. Bits  $14 \sim 15$  are undefined. During code verification, reading will return the result "00".

Select the TSEL and OSEL to program and verify the program PROM and option PROM. Use the R/W (PA6) to select the programming or verification.

21


The address is automatically incremented by one after a code verification cycle. If the discontinued address programming or verification is accomplished, the automatic addressing increment is disabled. For the discontinued address programming and verification, the  $\overline{CS}$  pin must return to high level for a programming or verification cycle, that is, if a discontinued address is managed, the programming or verification cycle must be interrupted and restarted as well.

The related pins of PROM programming and verification are listed in the following table.


Pin Name	Function	Description
PA0	AD0	Bit 0 of address/data bus
PA1	AD1	Bit 1 of address/data bus
PA2	AD2	Bit 2 of address/data bus
PA3	AD3	Bit 3 of address/data bus
PA4	CLK	Serial clock input for address and data
PA5	CS	Chip select, active low
PA6	R/W	Read/write control input
RES	VPP	Programming the power supply

The timing charts of programming and verification are as shown. There is a LOCK signal for code protection. If the LOCK is "1", reading the code will return the result "1". However, if the LOCK is "0", the code protection is disabled and the code can always be read until the LOCK is programmed as "1".



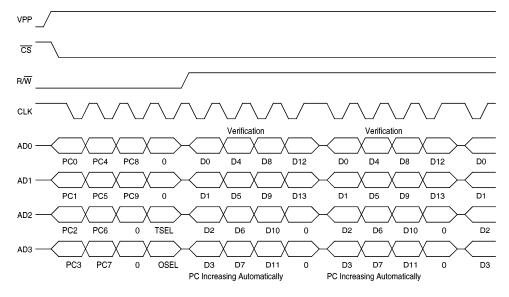


Successive verification

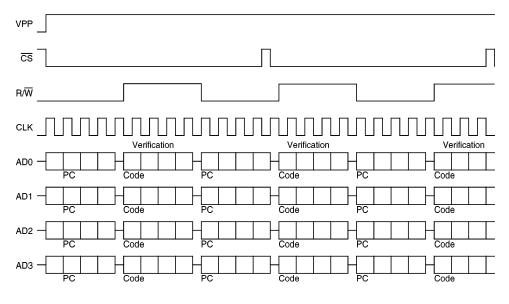

Non-successive verification


22



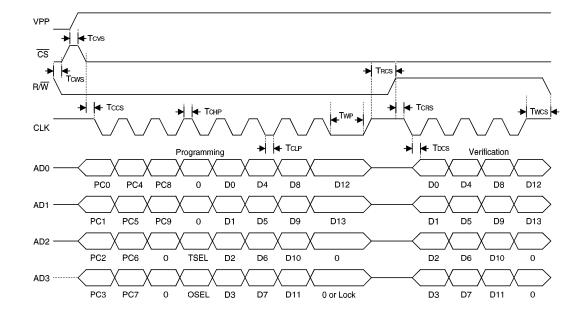


Code programming and verification



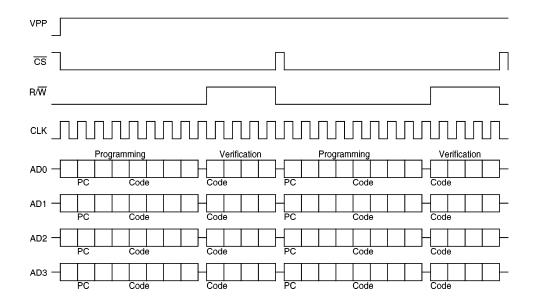


Non-successive programming and verification

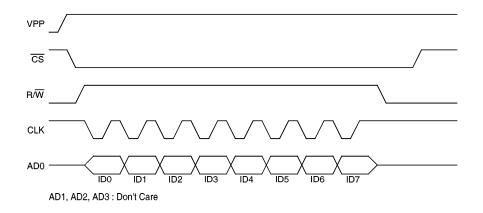

Code programming and verification

3nd June '98



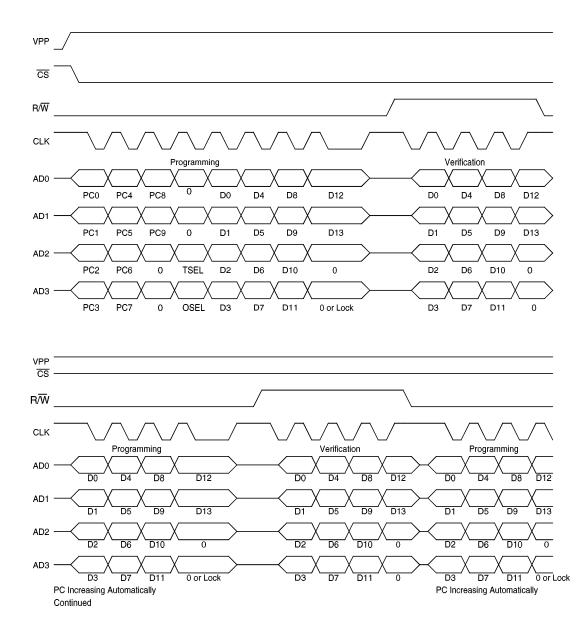

Successive programming and verification

3nd June '98



# **Instruction Set Summary**

Mnemonic	Description	Instruction Cycle	Flag Affected
Arithmetic			
ADD A,[m] ADDM A,[m]	Add data memory to ACC Add ACC to data memory	$1 \\ 1^{(1)}$	Z,C,AC,OV Z,C,AC,OV
ADD A,x ADC A,[m] ADCM A,[m]	Add immediate data to ACC Add data memory to ACC with carry Add ACC to register with carry	1 1 1 <sup>(1)</sup>	Z,C,AC,OV Z,C,AC,OV Z,C,AC,OV
SUB A,x SUB A,[m] SUBM A,[m]	Subtract immediate data from ACC Subtract data memory from ACC Subtract data memory from ACC with result in data	$1 \\ 1 \\ 1^{(1)}$	Z,C,AC,OV Z,C,AC,OV Z,C,AC,OV
SBC A,[m] SBCM A,[m]	memory Subtract data memory from ACC with carry Subtract data memory from ACC with carry and result in data memory	1 1(1)	Z,C,AC,OV Z,C,AC,OV
DAA [m]	Decimal adjust ACC for addition with result in data memory	1 <sup>(1)</sup>	С
Logic Operation			
AND A,[m] OR A,[m] XOR A,[m] ANDM A,[m] ORM A,[m] XORM A,[m] AND A,x OR A,x XOR A,x CPL [m] CPLA [m] Increment &	AND data memory to ACC OR data memory to ACC Exclusive-OR data memory to ACC AND ACC to data memory OR ACC to data memory Exclusive-OR ACC to data memory AND immediate data to ACC OR immediate data to ACC Exclusive-OR immediate data to ACC Complement data memory Complement data memory with result in ACC	$1 \\ 1 \\ 1^{(1)} \\ 1^{(1)} \\ 1^{(1)} \\ 1 \\ 1 \\ 1 \\ 1^{(1)} \\ 1$	Z Z Z Z Z Z Z Z Z Z
Decrement &			
INCA [m] INC [m] DECA [m] DEC [m]	Increment data memory with result in ACC Increment data memory Decrement data memory with result in ACC Decrement data memory	$1 \\ 1^{(1)} \\ 1 \\ 1^{(1)}$	Z Z Z Z

3nd June '98



Mnemonic	Description	Instruction Cycle	Flag Affected
Rotate			
RRA [m] RR [m] RRCA [m]	Rotate data memory right with result in ACC Rotate data memory right Rotate data memory right through carry with result in	1 1 <sup>(1)</sup> 1	None None C
RRC [m]	ACC Rotate data memory right through carry	1 <sup>(1)</sup>	С
RLA [m]	Rotate data memory left with result in ACC	1 1 <sup>(1)</sup>	None
RL [m] RLCA [m]	Rotate data memory left Rotate data memory left through carry with result in ACC	1	None C
RLC [m]	Rotate data memory left through carry	1 <sup>(1)</sup>	С
Data Move			
MOV A,[m] MOV [m],A MOV A,x	Move data memory to ACC Move ACC to data memory Move immediate data to ACC	$1\\1^{(1)}\\1$	None None None
Bit Operation			
CLR [m].i SET [m].i	Clear bit of data memory Set bit of data memory	$1^{(1)}$ $1^{(1)}$	None None
Branch			
JMP addr SZ [m] SZA [m]	Jump unconditionally Skip if data memory is zero Skip if data memory is zero with data movement to ACC	$21^{(2)}1^{(2)}$	None None None
SZ [m].i SNZ [m].i	Skip if bit i of data memory is zero Skip if bit i of data memory is not zero	$1^{(2)}$ $1^{(2)}$	None None
SIZ [m] SDZ [m]	Skip if increment data memory is zero Skip if decrement data memory is zero	$1^{(3)}$ $1^{(3)}$	None None
SIZA [m]	Skip if increment data memory is zero with result in ACC	1 <sup>(2)</sup>	None
SDZA [m]	Skip if decrement data memory is zero with result in ACC	1 <sup>(2)</sup>	None
CALL addr	Subroutine call	2	None
RET RET A,x	Return from subroutine Return from subroutine and load immediate data to ACC	2 2	None None
RETI	Return from interrupt	2	None



Mnemonic	Description	Instruction Cycle	Flag Affected
Table Read			
TABRDC [m]	Read ROM code (current page) to data memory and TBLH	2 <sup>(1)</sup>	None
TABRDL [m]	Read ROM code (last page) to data memory and TBLH	2 <sup>(1)</sup>	None
Miscellaneous			
NOP	No operation	1	None
CLR [m]	Clear data memory	1 <sup>(1)</sup>	None
SET [m]	Set data memory	1 <sup>(1)</sup>	None
CLR WDT	Clear watchdog timer	1	TO,PD
CLR WDT1	Pre-clear watchdog timer	1	$TO^{(4)}, PD^{(4)}$
CLR WDT2	Pre-clear watchdog timer	1	TO <sup>(4)</sup> , PD <sup>(4)</sup>
SWAP [m]	Swap nibbles of data memory	$1^{(1)}$	None
SWAPA [m]	Swap nibbles of data memory with result in ACC	1	None
HALT	Enter power down mode	1	TO,PD

Notes:

x: 8 bits immediate data

m: 7 bits data memory address

A: accumulator

i: 0~7 number of bits

addr: 10 bits program memory address

- $\sqrt{1}$ : Flag is affected
- -: Flag is not affected
- <sup>(1)</sup>: If a loading to the PCL register occurs, the execution cycle of instructions will be delayed one more cycle (four system clocks).

<sup>(2)</sup>: If a skipping next instruction occurs, the execution cycle of instructions will be delayed one more cycle (four system clocks). Otherwise the original instruction cycle is unchanged. <sup>(3)</sup>: <sup>(1)</sup> and <sup>(2)</sup>

<sup>(4)</sup>: The flags may be affected by the execution status. If the watchdog timer is cleared by executing the CLR WDT1 or CLR WDT2 instruction, the TO is set and the PD is cleared. Otherwise the TO and PD flags remain unchanged.



## **Instruction Definition**

ADC A,[m]			·		•		ımulat	
Description							nory, a result i	
Operation	ACC ←			-		8		
Affected flag(s)								
	TC2	TC1	ТО	PD	OV	Z	AC	С
	_	_	_	_				
						•		
ADCM A,[m]	Add th	e accu	mulato	or and	carry t	o data	memo	ry
Description				-			nory, a	
				eously,	leavin	g the	result i	n the
Operation	[m] ←	ACC+[	m]+C					
Affected flag(s)								
	TC2	TC1	то	PD	OV	Z	AC	С
	_	-	-	-	$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$
ADD A,[m]	Add da		°,					1.1
Description	The co The re						nory ar :	ia the
Operation	ACC ←	- ACC+	-[m]					
Affected flag(s)								
	TCO	max	-					
	TC2	TC1	TO	PD	OV	Z	AC	С
	-	-	TO _	PD _	OV √			
	-	-	- -	PD -		Z √	AC √	C √
ADD A,x	Add in	-	-	-	$\checkmark$	$\checkmark$		
<b>ADD A,x</b> Description	– Add in The co	– nmedia ntents	– te data of the a	– a to the	√ e accur	√ nulato		
Description	– Add in The co result	– nmedia ntents in the a	– te data of the a accum	– a to the	√ e accur	√ nulato	√	
Description Operation	– Add in The co	– nmedia ntents in the a	– te data of the a accum	– a to the	√ e accur	√ nulato	√	
Description	– Add in The co result	– nmedia ntents in the a	– te data of the a accum	– a to the	√ e accur ılator a	√ nulato	√	
Description Operation	– Add in The co result	– nmedia ntents in the a	– te data of the a accum	– a to the	√ e accur	√ nulato	√	

3nd June '98



ADDM A,[m]	Add the	accun	nulato	or to th	e data	memo	ory					
Description	The con The res							nd the	accum	ulato	or are a	addo
Operation	$[m] \leftarrow A$	CC+[n	n]									
Affected flag(s)												
	TC2	TC1	то	PD	OV	Ζ	AC	С				
	_	-	_	-	$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$				
AND A,[m]	Logical	AND a	accum	ulator	with d	ata m	emory					
Description	Data in logical_										rm a b	itw
Operation	ACC ←	ACC ".	AND"	'[m]								
Affected flag(s)												
	TCO	TC1	ТО	PD	OV	Z	AC	С				
	TC2											
	-	-	_	-	-	$\checkmark$	_	_				
AND A,x	Logical	– AND i	_ immed	– liate d	– ata to t		– cumula	– tor				
AND A,x Description	-	n the a	accum	ulator	and t	the aco he sp	ecified	data j			bitwise	e lo
	– Logical Data in	n the a D opera	accum ation.	ulator The r	and t	the aco he sp	ecified	data j			bitwise	e lo
Description	– Logical Data in cal_ANI	n the a D opera	accum ation.	ulator The r	and t	the aco he sp	ecified	data j			bitwise	e lo
Description Operation	- Logical Data in cal_ANI ACC ←	n the a D opera	accum ation.	ulator The r	and t	the aco he sp	ecified	data j			bitwise	e lo
Description Operation	- Logical Data in cal_ANI ACC ←	n the a D opera ACC ".	accum ation. AND"	ulator The ro ' x	and t esult is	the acc he sp store	ecified d in the	data j e accun			bitwise	e lo
Description Operation	- Logical Data in cal_ANI ACC ← TC2	n the a D opera ACC " TC1 -	accum ation. AND" TO -	PD	and t esult is OV -	the acc the sp store $\frac{z}{}$	ecified d in the AC –	data j e accum C –			bitwise	e lo
Description Operation Affected flag(s)	- Logical Data in cal_ANI ACC ← TC2 -	TC1 AND of AND of the sp	accum ation. AND" TO - data n pecific	nulator The ro ' x PD – nemory ed data	and t esult is OV - / with t	the acc he sp store $\frac{Z}{}$	ecified d in the AC 	data j e accur C - itor	nulato lator j	r. perfo	rm a b	
Description Operation Affected flag(s) ANDM A,[m]	- Logical Data in cal_ANI ACC ← TC2 - Logical Data in	TC1 - AND control ACC ". AND control the sp AND o	accum ation. AND" TO – data n pecific	PD - nemory ed data ion. Th	and t esult is OV - / with t	the acc he sp store $\frac{Z}{}$	ecified d in the AC 	data j e accur C - itor	nulato lator j	r. perfo	rm a b	
Description Operation Affected flag(s) ANDM A,[m] Description	- Logical Data in cal_ANI ACC ← TC2 - Logical Data in logical_	TC1 - AND control ACC ". AND control the sp AND o	accum ation. AND" TO – data n pecific	PD - nemory ed data ion. Th	and t esult is OV - / with t	the acc he sp store $\frac{Z}{}$	ecified d in the AC 	data j e accur C - itor	nulato lator j	r. perfo	rm a b	
Description Operation Affected flag(s) ANDM A,[m] Description Operation	- Logical Data in cal_ANI ACC ← TC2 - Logical Data in logical_ [m] ← A	TC1 - AND control ACC ". AND control the sp AND o	accum ation. AND" TO – data n pecific	PD - nemory ed data ion. Th	and t esult is OV - / with t	the acc he sp store $\frac{Z}{}$	ecified d in the AC 	data j e accur C - itor	nulato lator j	r. perfo	rm a b	



CALL addr	Subroutine call
Description	The instruction unconditionally calls a subroutine located at the indicated address. The program counter increments once to obtain the address of the next instruction, and pushes this onto the stack. The indicated address is then loaded. Program execution continues with the instruction at this address.
Operation	$\begin{array}{l} Stack \leftarrow PC+1 \\ PC \leftarrow addr \end{array}$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
CLR [m]	Clear data memory
Description	The contents of the specified data memory are cleared to zero.
Operation	$[m] \leftarrow 00H$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
CLR [m].i	Clear bit of data memory
Description	The bit i of the specified data memory is cleared to zero.
Operation	$[m].i \leftarrow 0$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
CLR WDT	Clear watchdog timer
Description	The WDT and the WDT Prescaler are cleared (re-counting from zero). The power down bit (PD) and time-out bit (TO) are cleared.
Operation	WDT and WDT Prescaler $\leftarrow$ 00H PD and TO $\leftarrow$ 0
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
	0 0



CLR WDT1	Precle	ar wato	chdog t	imer					
Description	The TD, PD flags, WDT and the WDT Prescaler has cleared (re-counting from zero), if the other preclear WDT instruction has been executed. Only execution of this instruction without the other preclear instruction sets the indicated flag which implies that this instruction has been executed and the TO and PD flags remain unchanged.								
Operation	WDT a PD an			scaler	← <b>00</b> H	[*			
Affected flag(s)									
	TC2 -	TC1	TO 0*	PD 0*	OV -	Z -	AC -	C -	
CLR WDT2	Precle	ar wato	hdog t	timer					
Description	zero), i tion of	if the o this in lag wh	ther pr istruct ich im	reclear ion wi plies tl	WDT thout t hat this	instru he oth s instr	ction h Ier pre	ias bee clear ii	leared (re-counting from n executed. Only execu- nstruction sets the indi- ten executed and the TO
Operation	WDT an			scaler	← 00H	[*			
Affected flag(s)									
	TC2	TC1	ТО	PD	OV	Z	AC	С	
	_	-	0*	0*	-	_	-	_	
CPL [m]	Compl	ement	data n	nemory	/				
Description		Bits							nplemented (1's comple- e changed to zero and
Operation	$[m] \leftarrow$	[ <u>m</u> ]							
Affected flag(s)									
	TC2	TC1	ТО	PD	OV	Z	AC	С	



<b>CPLA [m]</b> Description	Complement data memory and place result in the accumulator Each bit of the specified data memory is logically complemented (1's comple- ment). Bits which previously contained a one are changed to zero and vice-versa. The complemented result is stored in the accumulator and the contents of the data memory remain unchanged.
Operation	$ACC \leftarrow [\overline{m}]$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
DAA [m]	Decimal-Adjust accumulator for addition
Description Operation	The accumulator value is adjusted to the BCD (Binary Code Decimal) code. The accumulator is divided into two nibbles. Each nibble is adjusted to the BCD code and an internal carry (AC1) will be done if the low nibble of the accumulator is greater than 9. The BCD adjustment is done by adding 6 to the original value if the original value is greater than 9 or a carry (AC or C) is set; otherwise the original value remains unchanged. The result is stored in the data memory and only the carry flag (C) may be affected. If ACC.3~ACC.0 >9 or AC=1
	then [m].3~[m].0 $\leftarrow$ (ACC.3~ACC.0)+6, AC1= $\overline{AC}$ else [m].3~[m].0) $\leftarrow$ (ACC.3~ACC.0), AC1=0 and If ACC.7~ACC.4+AC1 >9 or C=1 then [m].7~[m].4 $\leftarrow$ ACC.7~ACC.4+6+AC1,C=1 else [m].7~[m].4 $\leftarrow$ ACC.7~ACC.4+AC1,C=C
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
DEC [m]	Decrement data memory
Description	Data in the specified data memory is decremented by one.
Operation	$[m] \leftarrow [m]-1$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C



DECA [m]	Decrement data memory and place result in the accumulator
Description	Data in the specified data memory is decremented by one, leaving the result in the accumulator. The contents of the data memory remain unchanged.
Operation	$ACC \leftarrow [m]-1$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
HALT	Enter power down mode
Description	This instruction stops program execution and turns off the system clock. The contents of the RAM and registers are retained. The WDT and prescaler are cleared. The power down bit (PD) is set and the WDT time-out bit (TO) is cleared.
Operation	$\begin{array}{l} PC \leftarrow PC+1 \\ PD \leftarrow 1 \\ TO \leftarrow 0 \end{array}$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
	0 1
INC [m]	Increment data memory
Description	Data in the specified data memory is incremented by one.
Operation Affected flag(s)	$[m] \leftarrow [m]+1$
U U	TC2 TC1 TO PD OV Z AC C
INCA [m]	Increment data memory and place result in the accumulator
Description	Data in the specified data memory is incremented by one, leaving the result in the accumulator. The contents of the data memory remain unchanged.
Operation	$ACC \leftarrow [m]+1$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C



JMP addr	Directly jump
Description	Bits 0~9 of the program counter are replaced with the directly-specified address unconditionally, and control is passed to this destination.
Operation	$PC \leftarrow addr$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
MOV A,[m]	Move data memory to the accumulator
Description	The contents of the specified data memory are copied to the accumulator.
Operation	$ACC \leftarrow [m]$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
MOV A,x	Move immediate data to the accumulator
Description	The 8-bit data specified by the code is loaded into the accumulator.
Operation	$ACC \leftarrow x$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
MOV [m],A	Move the accumulator to data memory
Description	The contents of the accumulator are copied to the specified data memory (one of the data memories).
Operation	$[m] \leftarrow ACC$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
NOP	No operation
Description	No operation is performed. Execution continues with the next instruction.
Operation	$PC \leftarrow PC+1$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C

	Ļ							
HOLTEK								
OR A,[m]	Logica	l OR a	ccumu	lator w	vith da	ta mei	norv	
Description	Data i	in the	accum	ulator	and tl	ie spe	cified o	
		ries) pe ulator.	rform	a bitwi	se logi	cal_OI	R opera	tion.
Operation	ACC	– ACC	"OR" [	m]				
Affected flag(s)								
	TC2	TC1	ТО	PD	OV	Z	AC	С
	_	-		-	-	$\checkmark$	-	-
OR A.x	Logica	l OR ir	nmedi	ate dat	a to th	e accu	mulato	or
Description	Data i	n the a	ccumu	lator a	nd the	specif	ied dat	a perf
Oraciantian	-	ion. Th – ACC			ored in	the a	ccumul	ator.
Operation Affected flag(s)	AUU 4	- ACC	UR X	2				
milected mag(b)	TC2	TC1	ТО	PD	OV	Z	AC	С
	_	_	_	_	-		-	_
				1				
ORM A,[m]				v			ımulato data m	
Description		m a bi					on. The	
Operation	[m] ←	ACC "(	OR" [n	n]				
Affected flag(s)								
	TC2	TC1	ТО	PD	OV	Z	AC	С
	_	-	-	-	-		-	-
RET	Return	n from	subrou	ıtine				
Description	The pi tion.	rogram	count	er is re	estored	from	the sta	ck. Tł
Operation	$\text{PC} \leftarrow$	Stack						
Affected flag(s)								
	TC2	TC1	ТО	PD	OV	Z	AC	С
	-	-	-	-	-	-	-	-



RET A,x	Returr	-							
Description	The pr with th							ck and	l the accumulator loaded
Operation	$PC \leftarrow S$ ACC $\leftarrow$								
Affected flag(s)									1
	TC2	TC1	ТО	PD	OV	Z	AC	С	-
	-	-	-	-	-	-	-	-	
RETI	Returr	n from i	interru	ıpt					
Description		ing the	EMI						d interrupts are enabled obal) interrupt bit (bit 0;
Operation	PC ← S EMI ←								
Affected flag(s)									7
	TC2	TC1	ТО	PD	OV	Ζ	AC	С	-
	-	-	-	-	-	-	-	-	
RL [m]	Rotate	data r	nemor	y left					
Description	The co rotated			specifi	ied dat	a men	nory ar	e rotat	ted one bit left with bit 7
Operation	[m].(i+ [m].0			ı].i:bit	i of the	data	memor	ry (i=0	-6)
Affected flag(s)									7
	TC2	TC1	ТО	PD	OV	Ζ	AC	С	
	-	-	-	-	-	-	-	-	
RLA [m]	Rotate	data n	nemor	y left a	nd pla	ce resi	ılt in tl	he acc	umulator
Description	Data i	n the s t 0, lea	pecifie ving tl	d data ne rota	memo ted res	ory is 1 sult in	otated	one b	it left with bit 7 rotated ator. The contents of the
Operation	ACC.(i ACC.0			m].i:bi	t i of tl	ne data	a memo	ory (i=	0-6)
Affected flag(s)									7
	TC2	TC1	ТО	PD	OV	Ζ	AC	С	-
	-	-	-	-	-	-	-	-	



RLC [m]	Rotate data memory left through carry							
Description	The contents of the specified data memory and the carry flag are rotated one bit left. Bit 7 replaces the carry bit; the original carry flag is rotated into the							
	bit 0 position.							
Operation	$\begin{array}{l} [m].(i+1) \leftarrow [m].i; \ [m].i:bit \ i \ of \ the \ data \ memory \ (i=0-6) \\ [m].0 \leftarrow C \\ C \ \leftarrow [m].7 \end{array}$							
Affected flag(s)								
	TC2 TC1 TO PD OV Z AC C							
	√							
RLCA [m]	Rotate left through carry and place result in the accumulator							
Description	Data in the specified data memory and the carry flag are rotated one bit lef Bit 7 replaces the carry bit and the original carry flag is rotated into bit position. The rotated result is stored in the accumulator but the contents the data memory remain unchanged.							
Operation	ACC.(i+1) $\leftarrow$ [m].i; [m].i:bit i of the data memory (i=0-6) ACC.0 $\leftarrow$ C C $\leftarrow$ [m].7							
Affected flag(s)								
8(-)	TC2 TC1 TO PD OV Z AC C							
	√							
RR [m]	Rotate data memory right							
Description	The contents of the specified data memory are rotated one bit right with b 0 rotated to bit 7.							
Operation	[m].i $\leftarrow$ [m].(i+1); [m].i:bit i of the data memory (i=0-6) [m].7 $\leftarrow$ [m].0							
Affected flag(s)								
_	TC2 TC1 TO PD OV Z AC C							



RRA [m]	Rotate	right-j	place r	esult i	n the a	iccumi	ılator		
Description	into bi		ving t	he rota	ted re	sult in			t right with bit 0 rotated ator. The contents of the
Operation		$(i) \leftarrow [m] \leftarrow [m] \rightarrow (i)$		; [m].i:l	bit i of	the da	ta mer	nory (i	=0-6)
Affected flag(s)									_
	TC2	TC1	ТО	PD	OV	Z	AC	С	
	-	-	-	-	-	-	-	-	
RRC [m]	Rotate	data r	nemor	y right	throu	gh cari	ry		
Description	rotate		it righ	nt. Bit	0 repla				e carry flag are together the original carry flag is
Operation	[m].i ← [m].7 ← C ← [n		+1); [n	n].i:bit	i of the	e data	memoi	ry (i=0	-6)
Affected flag(s)									
	TC2	TC1	ТО	PD	OV	Z	AC	С	
	-	-	-	-	-	-	-	$\checkmark$	
RRCA [m]	Rotate	right t	throug	h carry	y-place	result	in the	accun	nulator
Description	Bit 0 r 7 posit	eplaces	s the c ne rota	arry bi ited re	t and t sult is	he orig stored	ginal c	arry fl	are rotated one bit right. ag is rotated into the bit mulator. The contents of
Operation	ACC.i ACC.7 $C \leftarrow [n]$		(i+1);	m].i:bi	t i of t	ne data	a mem	ory (i=	0-6)
Affected flag(s)									-
	TC2	TC1	то	PD	OV	Z	AC	С	
	-	-	-	-	-	-	-	$\checkmark$	
Description Operation Affected flag(s) RRCA [m] Description Operation	The corrotated rotated $[m].i \leftarrow [m].7 \leftarrow C \leftarrow [m]$ <b>TC2</b> <b>-</b> <b>Rotate</b> Data o Bit 0 r 7 posit the da ACC.i ACC.7 C $\leftarrow [m]$	$\begin{array}{c} \text{ontents} \\ \text{d one b} \\ \text{d into t} \\ - [m].(i \\ - C \\ n].0 \\ \hline \\ $	of the bit righ he bit +1); [n TO - throug becified s the cr ne rota nory re (i+1); [ TO	e specif nt. Bit 7 posit n].i:bit PD - h carry l data n arry bi ited re emain n m].i:bi	throu fied da 0 repla- tion. i of the OV - y-place memor t and t sult is unchar t i of the OV	gh carn ta mer aces th e data Z - result y and t the ori stored aged. ne data Z	mory a he carry memor	and the y bit; t ry (i=0 C  accum arry flag arry flag arry flag arry flag arry (i= C	-6) -6) nulator are rotated one bit right ag is rotated into the bi mulator. The contents o



SBC A,[m]	Subtract data memory and carry from the accumulator
Description	The contents of the specified data memory and the complement of the flag are subtracted from the accumulator, leaving the result in the accumulator.
Operation	$ACC \leftarrow ACC + [\overline{m}] + C$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
	- $ $ $$ $$
SBCM A,[m]	Subtract data memory and carry from the accumulator
Description	The contents of the specified data memory and the complement of the flag are subtracted from the accumulator, leaving the result in the memory.
Operation	$[m] \leftarrow ACC + [\overline{m}] + C$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
SDZ [m] Description	$   \sqrt{1}$ $\sqrt{1}$ Skip if decrement data memory is zero         The contents of the specified data memory are decremented by one.         result is zero       the next instruction is skipped. If the result is zero
	Skip if decrement data memory is zero
Description	Skip if decrement data memory is zero The contents of the specified data memory are decremented by one. result is zero, the next instruction is skipped. If the result is zer following instruction, fetched during the current instruction executi discarded and a dummy cycle is replaced to get the proper instruction cycles). Otherwise proceed with the next instruction (one cycle).
Description Operation	Skip if decrement data memory is zero The contents of the specified data memory are decremented by one. result is zero, the next instruction is skipped. If the result is zer following instruction, fetched during the current instruction executi discarded and a dummy cycle is replaced to get the proper instruction cycles). Otherwise proceed with the next instruction (one cycle).
Description Operation	Skip if decrement data memory is zero The contents of the specified data memory are decremented by one. result is zero, the next instruction is skipped. If the result is zer following instruction, fetched during the current instruction executi discarded and a dummy cycle is replaced to get the proper instruction cycles). Otherwise proceed with the next instruction (one cycle). Skip if ([m]-1)=0, [m] $\leftarrow$ ([m]-1)
Description Operation Affected flag(s)	Skip if decrement data memory is zeroThe contents of the specified data memory are decremented by one.result is zero, the next instruction is skipped. If the result is zerfollowing instruction, fetched during the current instruction executidiscarded and a dummy cycle is replaced to get the proper instructioncycles). Otherwise proceed with the next instruction (one cycle).Skip if ([m]-1)=0, [m] $\leftarrow$ ([m]-1)TC2 TC1 TO PD OV Z AC C
Description Operation Affected flag(s) SDZA [m]	Skip if decrement data memory is zeroThe contents of the specified data memory are decremented by one.result is zero, the next instruction is skipped. If the result is zerfollowing instruction, fetched during the current instruction executidiscarded and a dummy cycle is replaced to get the proper instructioncycles). Otherwise proceed with the next instruction (one cycle).Skip if ([m]-1)=0, [m] $\leftarrow$ ([m]-1)TC2 TC1 TO PD OV Z AC CDecrement data memory and place result in ACC, skip if zero
Description Operation Affected flag(s)	Skip if decrement data memory is zeroThe contents of the specified data memory are decremented by one.result is zero, the next instruction is skipped. If the result is zerfollowing instruction, fetched during the current instruction executidiscarded and a dummy cycle is replaced to get the proper instructioncycles). Otherwise proceed with the next instruction (one cycle).Skip if ([m]-1)=0, [m] $\leftarrow$ ([m]-1)TC2 TC1 TO PD OV Z AC C
Description Operation Affected flag(s) SDZA [m]	Skip if decrement data memory is zeroThe contents of the specified data memory are decremented by one.result is zero, the next instruction is skipped. If the result is zerfollowing instruction, fetched during the current instruction executidiscarded and a dummy cycle is replaced to get the proper instructioncycles). Otherwise proceed with the next instruction (one cycle).Skip if ([m]-1)=0, [m] $\leftarrow$ ([m]-1)TC2 TC1 TO PD OV Z AC CDecrement data memory and place result in ACC, skip if zeroThe contents of the specified data memory are decremented by one.result is zero, the next instruction is skipped. The result is stored is accumulator but the data memory remains unchanged. If the result is the following instruction, fetched during the current instruction execution is collected and a dummy cycle is replaced to get the proper instruction
Description Operation Affected flag(s) SDZA [m] Description	Skip if decrement data memory is zeroThe contents of the specified data memory are decremented by one.result is zero, the next instruction is skipped. If the result is zerfollowing instruction, fetched during the current instruction executiddiscarded and a dummy cycle is replaced to get the proper instructioncycles). Otherwise proceed with the next instruction (one cycle).Skip if ([m]–1)=0, [m] $\leftarrow$ ([m]–1)TC2 TC1 TO PD OV Z AC CDecrement data memory and place result in ACC, skip if zeroThe contents of the specified data memory are decremented by one.result is zero, the next instruction is skipped. The result is stored if accumulator but the data memory remains unchanged. If the result is the following instruction, fetched during the current instruction executidiscarded and a dummy cycle is replaced to get the proper instruction cycles). Otherwise proceed with the next instruction (one cycle).
Description Operation Affected flag(s) SDZA [m] Description Operation	Skip if decrement data memory is zeroThe contents of the specified data memory are decremented by one.result is zero, the next instruction is skipped. If the result is zerfollowing instruction, fetched during the current instruction executiddiscarded and a dummy cycle is replaced to get the proper instructioncycles). Otherwise proceed with the next instruction (one cycle).Skip if ([m]–1)=0, [m] $\leftarrow$ ([m]–1)TC2 TC1 TO PD OV Z AC CDecrement data memory and place result in ACC, skip if zeroThe contents of the specified data memory are decremented by one.result is zero, the next instruction is skipped. The result is stored if accumulator but the data memory remains unchanged. If the result is the following instruction, fetched during the current instruction executidiscarded and a dummy cycle is replaced to get the proper instruction cycles). Otherwise proceed with the next instruction (one cycle).



SET [m]	Set data memory
Description	Each bit of the specified data memory is set to one.
Operation	$[m] \leftarrow FFH$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
SET [m].i	Set bit of data memory
Description	Bit "i" of the specified data memory is set to one.
Operation	$[m].i \leftarrow 1$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
SIZ [m]	Skip if increment data memory is zero
Description	The contents of the specified data memory are incremented by one. If the
Ī,	result is zero, the following instruction, fetched during the current instruc-
	tion execution, is discarded and a dummy cycle is replaced to get the proper instruction (two cycles). Otherwise proceed with the next instruction (one cycle).
Operation	Skip if ([m]+1)=0, [m] $\leftarrow$ ([m]+1)
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
SIZA [m]	Increment data memory and place result in ACC, skip if zero
Description	The contents of the specified data memory are incremented by one. If the
	result is zero, the next instruction is skipped and the result is stored in the accumulator. The data memory remains unchanged. If the result is zero, the
	following instruction, fetched during the current instruction execution, is
	discarded and a dummy cycle is replaced to get the proper instruction (two cycles). Otherwise proceed with the next instruction (one cycle).
Operation	Skip if $([m]+1)=0$ , ACC $\leftarrow$ $([m]+1)$
Affected flag(s)	• • • • • • • • • • • • • • • • • • • •
0	TC2 TC1 TO PD OV Z AC C



<b>SNZ [m].i</b> Description Operation	Skip if bit "i" of the data memory is not zero If bit "i" of the specified data memory is not zero, the next instruction is skipped. If bit "i" of the data memory is not zero, the following instruction, fetched during the current instruction execution, is discarded and a dummy cycle is replaced to get the proper instruction (two cycles). Otherwise proceed with the next instruction (one cycle). Skip if [m].i≠0
Affected flag(s)	
8(-)	TC2 TC1 TO PD OV Z AC C
SUB A,[m]	Subtract data memory from the accumulator
Description	The specified data memory is subtracted from the contents of the accumula- tor, leaving the result in the accumulator.
Operation	$ACC \leftarrow ACC + \overline{[m]} + 1$
Affected flag(s)	
5.7	TC2 TC1 TO PD OV Z AC C
	$\begin{array}{c c c c c c c c c c c c c c c c c c c $
SUBM A,[m]	Subtract data memory from the accumulator
Description	The specified data memory is subtracted from the contents of the accumula- tor, leaving the result in the data memory.
Operation	$[m] \leftarrow ACC + [\overline{m}] + 1$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
SUB A,x	Subtract immediate data from the accumulator
Description	The immediate data specified by the code is subtracted from the contents of the accumulator, leaving the result in the accumulator.
Operation	$ACC \leftarrow ACC + \overline{x} + 1$
Affected flag(s)	
2	TC2 TC1 TO PD OV Z AC C



SWAP [m]	Swap nibbles within the data memory
Description	The low-order and high-order nibbles of the specified data memory (one of the data memories) are interchanged.
Operation Affected flag(s)	$[m].3 \sim [m].0 \leftrightarrow [m].7 \sim [m].4$
	TC2 TC1 TO PD OV Z AC C
SWAPA [m]	Swap data memory-place result in the accumulator
Description	The low-order and high-order nibbles of the specified data memory are interchanged, writing the result to the accumulator. The contents of the data memory remain unchanged.
Operation	$\begin{array}{l} ACC.3 \sim ACC.0 \leftarrow [m].7 \sim [m].4 \\ ACC.7 \sim ACC.4 \leftarrow [m].3 \sim [m].0 \end{array}$
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
SZ [m]	Skip if data memory is zero
Description	If the contents of the specified data memory are zero, the following instruc- tion, fetched during the current instruction execution, is discarded and a dummy cycle is replaced to get the proper instruction (two cycles). Otherwise proceed with the next instruction (one cycle).
Operation	Skip if [m]=0
Affected flag(s)	
	TC2 TC1 TO PD OV Z AC C
SZA [m]	Move data memory to ACC, skip if zero
Description	The contents of the specified data memory are copied to the accumulator. If the contents is zero, the following instruction, fetched during the current instruction execution, is discarded and a dummy cycle is replaced to get the proper instruction (two cycles). Otherwise proceed with the next instruction (one cycle).
Operation	Skip if $[m]=0$ , ACC $\leftarrow [m]$
Affected flag(s)	
	TC2         TC1         TO         PD         OV         Z         AC         C           -         -         -         -         -         -         -         -



SZ [m].i Description	Skip if bit "i" of the data memory is zero If bit "i" of the specified data memory is zero, the following instruction, fetched during the current instruction execution, is discarded and a dummy cycle is replaced to get the proper instruction (two cycles). Otherwise proceed with the next instruction (one cycle).								
Operation	Skip if [m].i=0								
Affected flag(s)									
	TC2 TC1 TO PD OV Z AC C								
TABRDC [m]	Move the ROM code (current page) to TBLH and data memory								
Description	The low byte of ROM code (current page) addressed by the table pointer (TBLP) is moved to the specified data memory and the high byte transferred to TBLH directly.								
Operation	$[m] \leftarrow ROM$ code (low byte) TBLH $\leftarrow$ ROM code (high byte)								
Affected flag(s)									
	TC2 TC1 TO PD OV Z AC C								
TABRDL [m]	Move the ROM code (last page) to TBLH and data memory								
Description	The low byte of ROM code (last page) addressed by the table pointer (TBLP) is moved to the data memory and the high byte transferred to TBLH directly.								
Operation	$\begin{tabular}{lllllllllllllllllllllllllllllllllll$								
Affected flag(s)									
	TC2 TC1 TO PD OV Z AC C								
XOR A,[m]	Logical XOR accumulator with data memory								
Description	Data in the accumulator and the indicated data memory perform a bitwise logical Exclusive_OR operation and the result is stored in the accumulator.								
Operation	$ACC \leftarrow ACC "XOR" [m]$								
Affected flag(s)									
	TC2 TC1 TO PD OV Z AC C								



XORM A,[m] Description	Logical XOR data memory with the accumulator Data in the indicated data memory and the accumulator perform a bitwise logical Exclusive_OR operation. The result is stored in the data memory. The zero flag is affected.										
Operation	$[m] \leftarrow ACC "XOR" [m]$										
Affected flag(s)											
	TC2	TC1	ТО	PD	OV	Z	AC	С			
	_	_	_	_	_	$\checkmark$	_	_			
XOR A,x	Logica	I XOR	immed	liate da	ata to t	he acc	umula	tor			
Description	Data in the the accumulator and the specified data perform a bitwise logical Exclusive_OR operation. The result is stored in the accumulator. The zero flag is affected.										
Operation	$ACC \leftarrow ACC$ "XOR" x										
Affected flag(s)											
	TC2	TC1	ТО	PD	OV	Z	AC	С			
	_	_	-	_	-		_	_			