



SCHEMATIC



PCB LAYOUT

RoHS Compliance

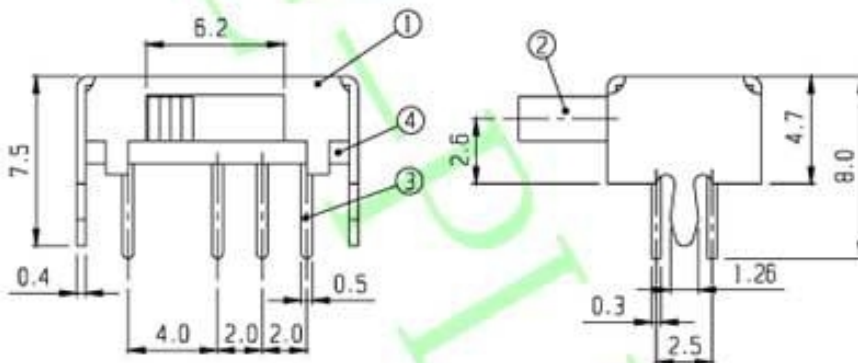

5	CONTACT	P B S	2	Ag PLATED	6	SPRING PLATE	P B S	1	
3	TERMINAL	BRASS	8	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1	VG 2-9
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED		SPECIFICATION			TITLE: SIDE KNOB SLIDE SWITCH (2P3T)					
	RATING: DC 30V 0.5A				MODEL NO: SK-23D03 (VG )					
	CONTACT RESISTANCE: 30mΩ max.				TOLERANCE		UNIT: MM		DWN.	
	INSULATION RESISTANCE: 500MΩ at 500V DC				UP TO 1.0:±0.1		SCALE: 4:1		CHK'D.	
	WITHSTAND VOLTAGE: AC 500V for 1 minute				1.0 TO 10.0:±0.2		VERSION: 02		APPD.	
	OPERATION FORCE: REFER ATTACH SPECIFICATION				OVER 10.0:±0.3		DRWG NO:			
SWITCHING LIFE: 10K cycles min.										
BY:		SEE-PLUS INDUSTRIAL LTD.								
DATE: 24-AUG-2006										