

## SPECIFICATIONS

### ELECTRICAL




- Contact Current Rating : 1 Ampere
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds

### MECHANICAL

- Insertion Force : 340 g Max / Pin
- Extraction Force : 50 g Min / Pin

### MATERIAL

- Insulator : PBT, UL 94V-0
- Contact : Phosphor Bronze
- Contact Plated : Tin Plated
- Operation Temperature : - 25°C to + 85°C

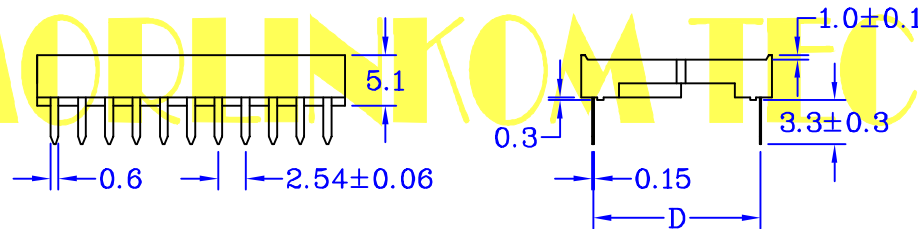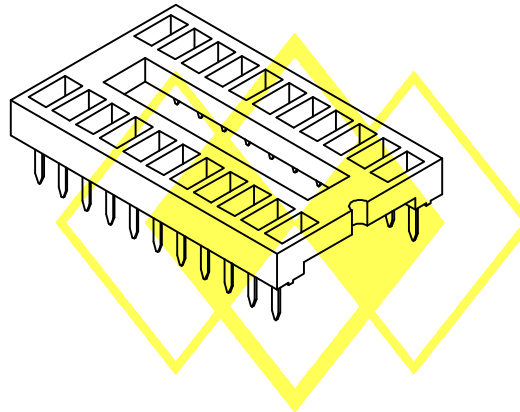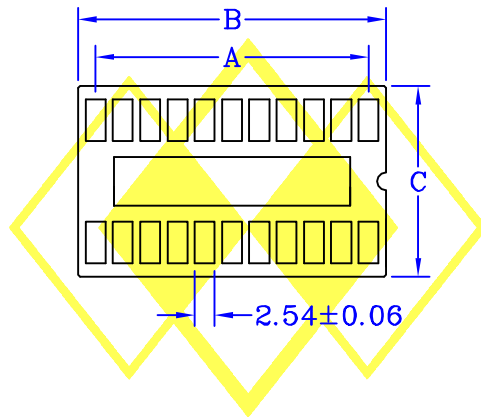

ICSAXXTB1BC	DIMENSION			
	CONTACTS	A <sup>+0.10</sup> <sub>-0.10</sub>	B <sup>+0.12</sup> <sub>-0.12</sub>	C <sup>+0.15</sup> <sub>-0.15</sub>
06	5.08	7.52	10.06	7.62
08	7.62	10.06		
14	15.42	17.68	10.06	7.62
16	17.78	20.22		
18	20.32	22.76	10.06	7.62
20	22.86	25.30		
22	25.40	27.84	10.06	7.62

UNIT: mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@tps6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY  
FUFU

核對 CHECKED BY  
WENDY

日期 DATE  
2008/12/15

比例 SCALE  
1:1

ICSAXXTB1BC

圖號 00-XX

DRAWING NO.