

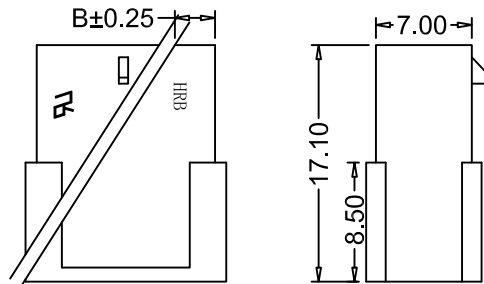


3.00mm(.118") Wire To Wire And Wire To Board Connector



SPECIFICATIONS:

- Current Rating:5A AC,DC
- Voltage Rating:250V AC,DC
- Operating Temperature:V2:-25°C~+85°C
V0:-40°C~+130°C
- Contact Resistance:10mΩ max.
- Insulation Resistance:1000MΩ Min.
- Withstanding Voltage:1500V AC/minute
- Material:Nylon66 UL94V-2/UL94V-0
- UL File No:E304945
- Terminal In Housing Retention Force Requirement:2.5kg (Min.)

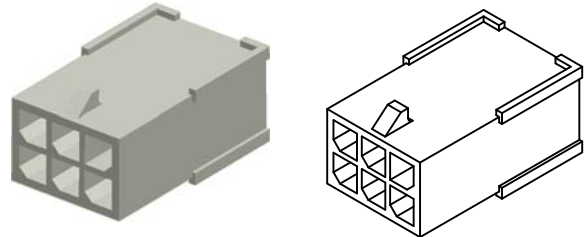

Ordering Information And Dimensions

Part NO.		Circuits	Dimensions		Part NO.		Circuits	Dimensions	
TYP UL94V-2	TYP UL94V-0		Dim:A	Dim:B	TYP UL94V-2	TYP UL94V-0		Dim:A	Dim:B
P3020-2x1-N-C	P3020-2x1-W-C	2	—	3.85	P3020-2x7-N-C	P3020-2x7-W-C	14	18.00	21.85
P3020-2x2-N-C	P3020-2x2-W-C	4	3.00	6.85	P3020-2x8-N-C	P3020-2x8-W-C	16	21.00	24.85
P3020-2x3-N-C	P3020-2x3-W-C	6	6.00	9.85	P3020-2x9-N-C	P3020-2x9-W-C	18	24.00	27.85
P3020-2x4-N-C	P3020-2x4-W-C	8	9.00	12.85	P3020-2x10-N-C	P3020-2x10-W-C	20	27.00	30.85
P3020-2x5-N-C	P3020-2x5-W-C	10	12.00	15.85	P3020-2x11-N-C	P3020-2x11-W-C	22	30.00	33.85
P3020-2x6-N-C	P3020-2x6-W-C	12	15.00	18.85	P3020-2x12-N-C	P3020-2x12-W-C	24	33.00	36.85

