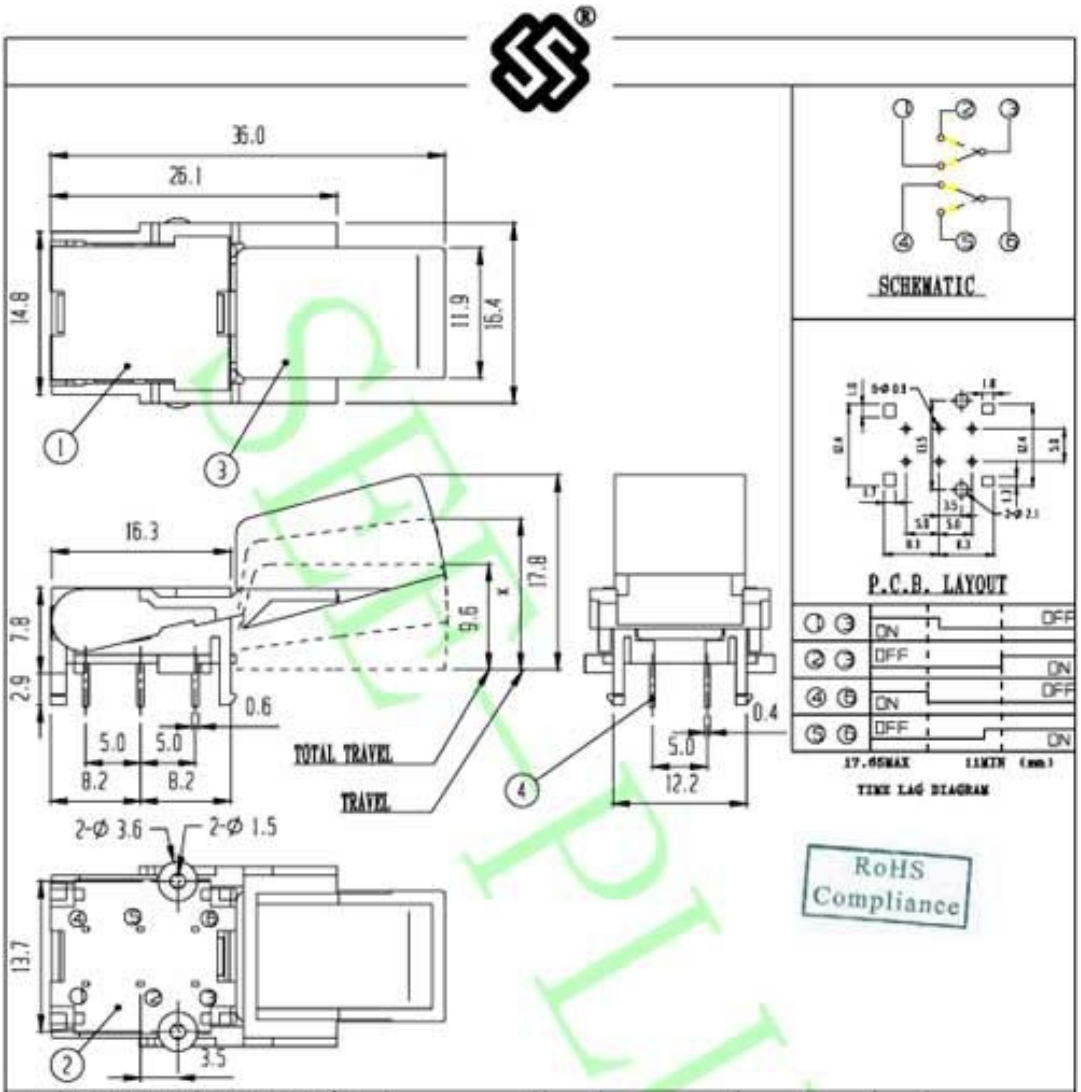

NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS
7	CONTACT CASE	NYLON33L	1						
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	S U S	1	
3	KNOB	P O M	1		4	TERMINAL	BRASS	6	Ag PLATED
1	COVER	P O M	1		2	FRAME	NYLON33L	1	

ISSUED	SPECIFICATION	TITLE: HOOK SWITCH			
	RATING: DC 60V 0.2A	MODEL NO: HS-2201A			
	CONTACT RESISTANCE: 50mΩ max.				
	INSULATION RESISTANCE: 100MΩ AT 500V DC	TOLERANCE	UNIT: MM	DWN.	
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE: 2:1	CHK'D.	
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 01		
	SWITCHING LIFE: 300K cycles min.	OVER 10.0:±0.3	DRWG NO:	APPD.	
BY:	SEE-PLUS INDUSTRIAL LTD.				
DATE: 04-MAR-2003					

Copyright© SEE_PLUS inductrial ltd.