



SCHEMATIC

RoHS
Compliance

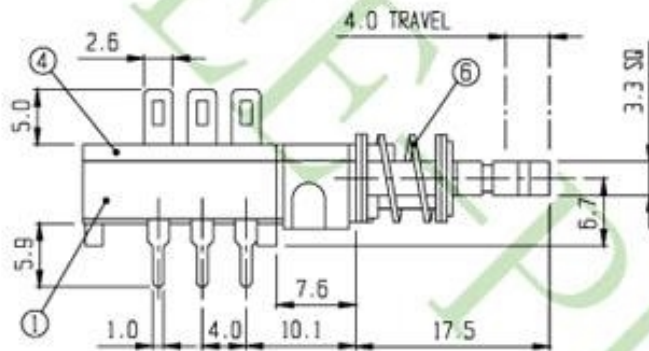

5	CONTACT	BRASS	2	Ag PLATED	6	SPRING	STEEL WIRE	3	
3	TERMINAL	BRASS	6	Ag PLATED	4	TERMINAL BASE	NYLON	1	
1	FRAME	P C	1		2	KNOB	P O M	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED SPECIFICATION TITLE: PUSH BUTTON SWITCH (2P2T) (UNLOCK)

	RATING: DC 30V 0.5A	MODEL NO: PBS-22H01-F18		
	CONTACT RESISTANCE: 30mΩ max.	TOLERANCE	UNIT: MM	DWN. <i>hno</i>
	INSULATION RESISTANCE: 100MΩ at 500V DC	UP TO 1.0:±0.1	SCALE: 1.5:1	CHK'D. <i>mm</i>
	WITHSTAND VOLTAGE: AC 500V for 1 minute	1.0 TO 10.0:±0.2	VERSION: 02	APPD. <i>hno</i>
OPERATION FORCE: REFER ATTACH SPECIFICATION	OVER 10.0:±0.3	DRWG NO:		
SWITCHING LIFE: 10K cycles min.				

BY: *[Signature]*
DATE: 12-MAY-2006

SEE-PLUS INDUSTRIAL LTD.

