



TSH Series

6.0×3.5 Taping Type Tact Switch

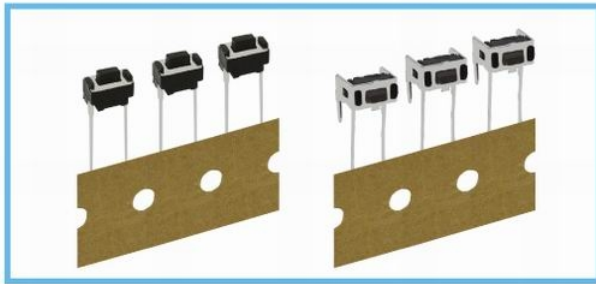

How to order

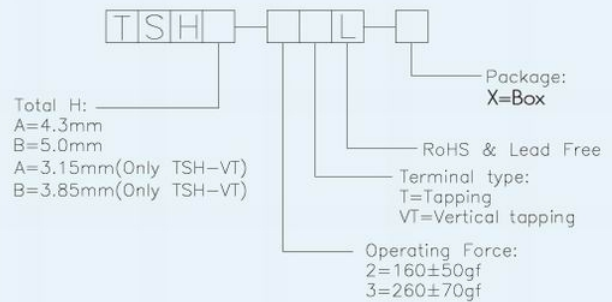

Features

- Supplied with radial taping.
- Allows automatic insertion onto PC board with the radial auto insertion machine.

Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communication apparatus, measuring instruments, TV sets, VCRs, etc.

Specification

Items	Standard	
Operating temperature range	-20°C to +70°C	
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	30,000 Cycles, 50,000 Cycles
	Operating force	2:160 ± 50gf, 3:260 ± 70gf
Mechanical performance	Travel	0.25 ± 0.1mm

Diagram

	TSH-T	TSH-VT
Dimensions		
Circuit Diagram	<p>Circuit Diagram</p>	<p>Circuit Diagram</p>
Pad Layout	<p>PCB Board</p>	<p>PCB Board</p>

* Please follow drawing of Approved Sheet that catalog drawing only for reference.