


NOTES:

- 1. Material:**
- 1-1 Terminal, Fitting Nail: Copper alloy
 - 1-2 Shell, Cam Pin, Spring: Stainless steel
 - 1-3 Housing, Cam: LCP, UL 94-V0, Black
- 2. Finish:**
- 2-1 Terminal: Nickel underplated, gold plating on contact area tin plating on solder tail
 - 2-2 Shell: Gold flash over nickel underplated on solder pad
- 3. Mechanical specification**
- 3-1 Repeated 5,000 times mating and unmating cycles and still meet electrical characteristics
- 4. Electrical specification**
- 4-1 Rated current (per contact): 0.5amps Max and temperature rise should be 30 degree Max
 - 4-2 Insulation resistance (I.R): 100M Ω Min
 - 4-3 Dielectric withstanding voltage: 500VAC
 - 4-4 Contact resistance: 100Milliohms Max
- 5. Colour: Black/White**
- GOLD FLASH: Ni:50-80u" Sn:100-120u" Au:1u"**

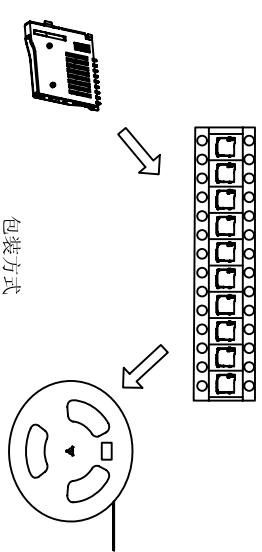

包裝方式

版次	修改內容	日期

REFERENCE PCB LAYOUT
TOLERANCES (± 0.05)

核准		未注公差	X.X	± 0.20	ACH 雅創电子有限公司 ACH ELECTRONICS CO., LTD TEL: 0755-88210101 FAX: 0755-88210123
審核			X.XX	± 0.15	
設計	ZQ	單位	2012-5-26	X.XXX	品名
			版次	A/0	圖號
			客戶編號	A348	客戶料號
					Micro SD
					3020-901-0001