


## 1-027 LED D5 Spacer Support



**Material:** UL qualified NYLON66(Black).  
**Usage:** To rapidly fix the LED over the chassis panel;  
**Flame Class:** 94V-2  
**Working Temperature:** -20°C - 120°C

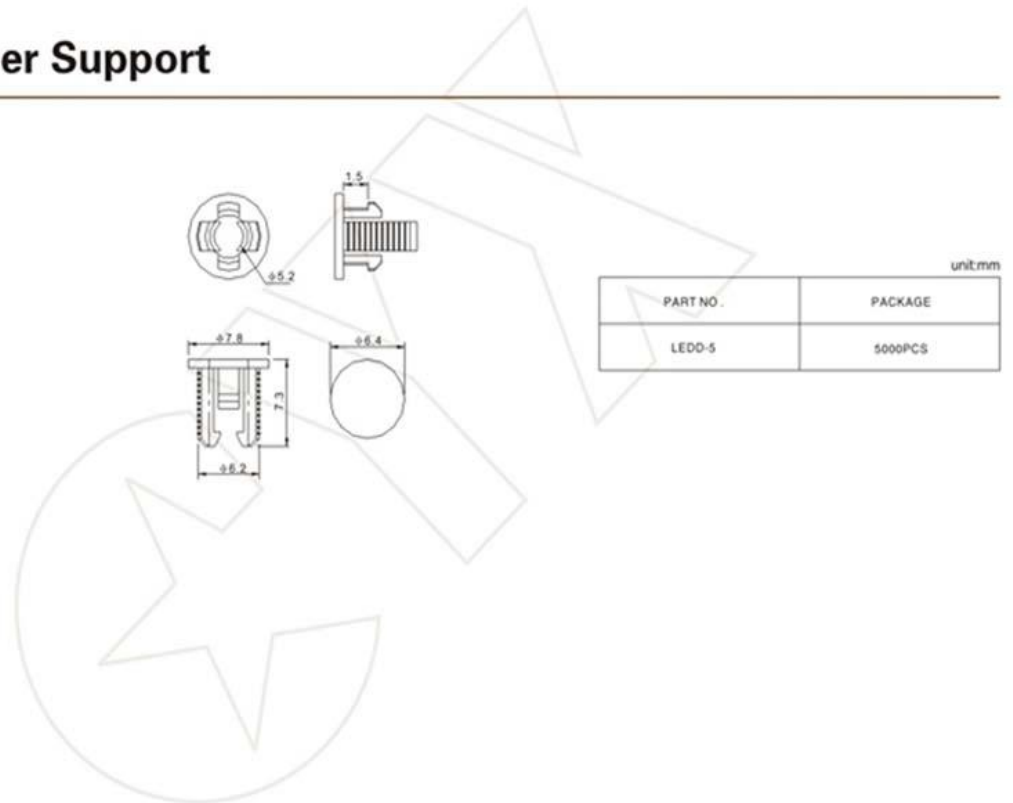

### Describe

Material: UL qualified NYLON66.

Usage: To protect LED over PC board, to make the height consistent; the middle support design to prevent the pins from bend ,break and short-circuit.

Color: Nylon natural or black color, special colors can be customized.

Specification: Our current parts are always the standard of this industry ,and special ones can be made through opening the molds.

Flame class: 94V-2 commonly,,94V-0 can be customized specially.

Working temperature : -20°C~120°C

MOQ: According to the minimum package of the parts.

Lead time : Generally we have lots of stock,otherwise the parts also can be customized ,and the lead time is around 4~7 working days.

Code explanation: A means 2 round holes; B means B type square hole; D means 2 slots; E&G mean round tube